

Lighthouse

JOURNAL OF THE CANADIAN HYDROGRAPHERS' ASSOCIATION


Edition No. 19, April, 1979



Introducing,

THE MOST ADVANCED, COMPREHENSIVE, PRECISION ECHO SOUNDER FOR HYDROGRAPHERS

KELVIN HUGHES MS48

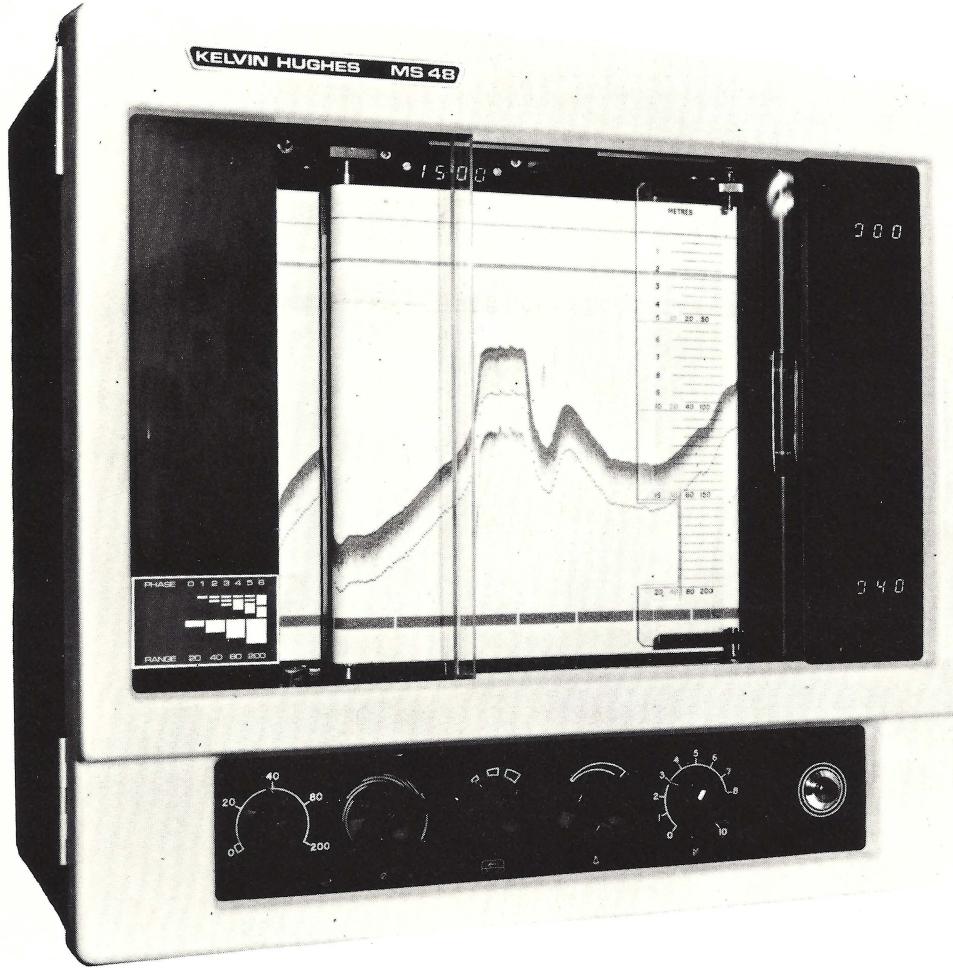

AN ENTIRELY NEW DIGITAL ELECTRONIC UNIT HAS BEEN DESIGNED TO OPERATE IN CONJUNCTION WITH THE MS48 TO PROVIDE DEPTH RESULTS FOR USE INTO A COMPUTER AND ASSOCIATED PRINT-OUT EQUIPMENT AS DESIRED.

The MS48 has been designed to meet the latest requirements for precision surveying in shallow and medium depths. Prior to its launch it successfully completed extensive sea trials for the Hydrographer of the Royal Navy and it is intended to fit it in all classes of RN survey vessels in place of the Type 771 and Type 772.

The MS48 has four depth scales, 0-20m, 0-40m, 0-80m and 0-200m. Each can be phased in six steps to maximum depths of 80m, 160m, 320m and 800m respectively. A unique feature is that the scale and phase in use are automatically shown on the record by coding marks. Another innovation is that the minimum and maximum depths which can be recorded with the range and phase in use are visually indicated. The recorder employs 10" wide paper with straight line recording.

A highly stable but variable speed motor drive system has been developed to enable the surveyor to set the stylus speed to correspond to the prevailing velocity of sound; this velocity is clearly displayed on a digital read-out. A separate digital equipment has also been developed as a compatible unit.

Changes in depth range are made by altering the frequency of the motor supply, thus avoiding the use of a change speed gearbox. The paper is driven by a separate motor, unaffected by adjustment of stylus speed.

KELVIN HUGHES

A DIVISION OF SMITHS INDUSTRIES NORTH AMERICA LIMITED
716 GOLF ROAD, NUN'S ISLAND, MONTREAL, P.Q.

Announcing the one that does it all.

No baloney. The brand new dry paper EPC Model 3200 does everything.

It includes every worthwhile function on existing side scan, profiling and spectrum recorders.

And it features functions never before seen on any machine. Look—

1/64TH SECOND DISPLAY.

The Model 3200 displays at ten rates between 8 seconds and 1/64th second. At the 1/64th second (15.4 millisecond) rate, it offers an unprecedented high resolution look at shallow water—8 times higher than ever offered before—displaying the first 35' across a full 19.2" record.



Sweeps are continuous or single, at any rate, in either direction. Single sweeps can be internally or externally triggered.

TWO CHANNEL OPERATION.

The 3200 can record a single channel across the entire printout—or record simultaneously on two channels, splitting the print-out in half. In the two channel mode, each channel is operated by a totally independent time base. It can therefore simultaneously record two different energy sources, sweep at two different speeds, and even sweep in two different directions.

Run on two channels as the ultimate 19.2" dry paper center-out side scan. Or with two energy sources creating a high resolution shallow profile while simultaneously recording deep seismic penetration data.

A creative mind boggles at the possibilities.

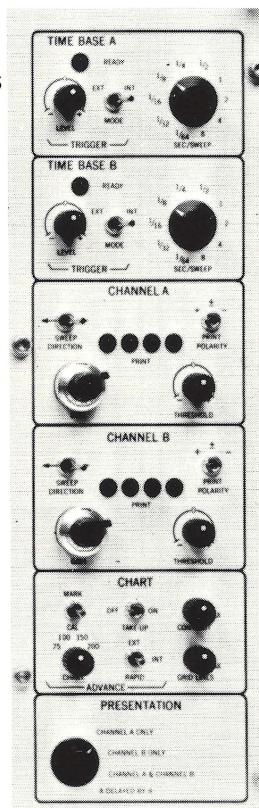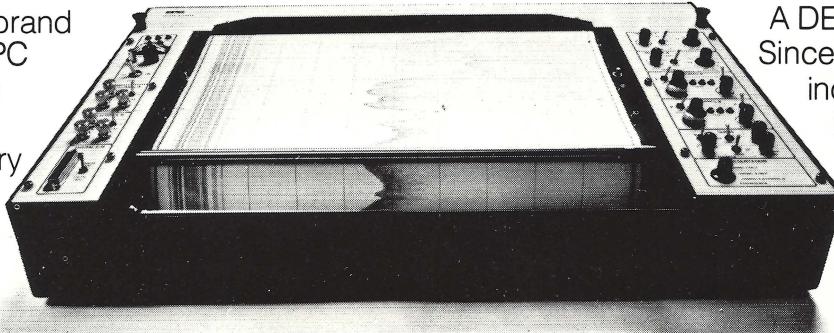


A DELAYED BY B. Since there are two independent time bases available, the 3200 can initiate a key pulse, delay the sweep by the time selected at B and then sweep at the time selected

at A. Delay 1/8 second, sweep at 8 seconds; delay 8 seconds, sweep at 1/8 second.

Crucial data therefore can be located accurately, and compressed or expanded to suit your needs.

DIGITIZED DATA.

Since the Model 3200's memory requires digital data, all input data is digitized. This means that data received as analog can be sent out to tape recorders as digital. Data recorded as digital is accepted directly.



TRIED AND TRUE COMPONENTS.

The construction is pure EPC. Jitter-free digital drives. Records on 19.2" dry paper with 23db dynamic range. Vernier chart advance. Rugged marine construction. State-of-the-art engineering. Functionally handsome looks.

Call or write for a new brochure, technical details and a quote.

EPC

EPC Labs, Inc.
5 Electronics Ave. Danvers, MA 01923
Tel. 617-777-1996 Telex 940454



ENGINEERING & SURVEYING CONSULTANTS

Pipeline Surveys

Exploration Location Surveys

Plantsite Surveys

Mineral Claim Surveys

Townsite Subdivision Surveys

Geodetic Control Surveys

Wellsite Surveys

Satellite Navigation & Positioning

Offshore Vessel Positioning

Airborne Surveys

Hydrographic Charting Surveys

Construction Surveys

Photo-Control Surveys

Pipeline Engineering Management

Right-of-Way Surveys

Ice-Movement Studies

Land Acquisition Services

CANADIAN ENGINEERING SURVEYS CO. LTD.

10310 Jasper Avenue

Edmonton, Canada

Telephone: Edmonton (403) 424-7385

Calgary (403) 264-2151

Telex: Cdn. Eng. Sur. Edm. 037-3850

Call us, We can help

AUTOMATIC PROOF

and easy operation with the reliable Mini-Ranger® electronic positioning system.

The project manager of this dredge and survey vessel gets complete printouts showing channel depth, pre-dredge and post-dredge profile plots and accurate volume calculations... easily... simply... automatically. The dredge master knows where he is and exactly where he needs to go.




And he can prove his work when it's done. The new automatic Mini-Ranger positioning system does it all and provides recorded proof of performance to satisfy his customer.

New data available

For the whole story on specifications, price and delivery

schedules, call (416) 499-1441 or write to Motorola, Military & Aerospace Electronics, 3125 Steeles Ave., East, Willowdale, Ontario. Ask about the equipment package that can simplify your dredging operation and provide your customer with proof of a job well done. You can also get the schedule on free training classes covering all aspects of automated dredge positioning.

Other offices: Bonn • Kuala Lumpur • London • Paris • Rome • Scottsdale (U.S.A.) • Utrecht

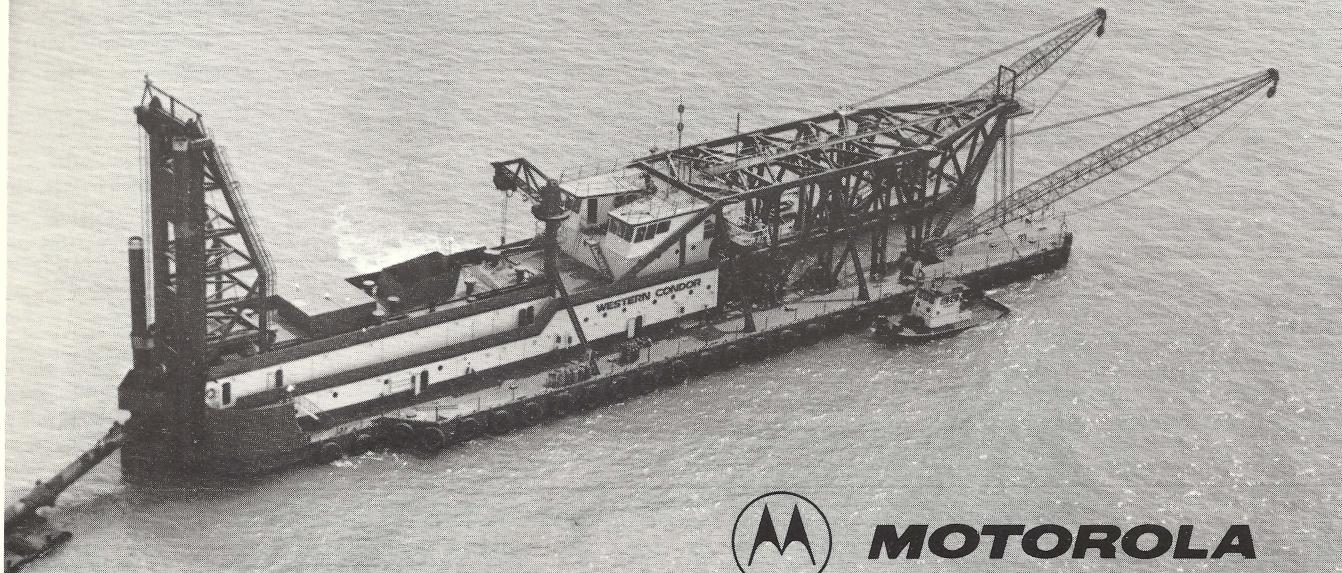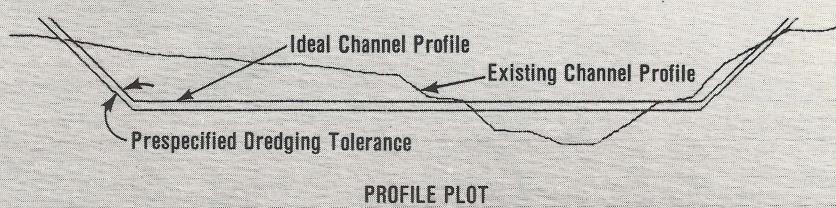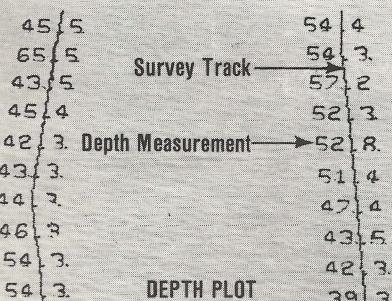

MOTOROLA

Making electronics history since 1928.

No Loran C chart?

No problem — with our Internavigator.

One of the constraints of Loran C (and all other hyperbolic navaids, for that matter) is that good results often depend on having a lattice chart covering your area, at a scale just right for your needs.

Unfortunately, such happy combinations are rare, and this can be a bit frustrating at times.

But no longer. Now, our CC-2 Internavigator allows precision Loran C operations independent of charts.


How? Microprocessor latitude/longitude conversion. Loran time differences are continuously displayed in lat/long with a resolution of one tenth of a second, and with provision for inserting corrections for local propagation anomalies due to overland paths, etc.

But the Internavigator does a lot more. Set it up to nine separate "waypoints" before departure (or while underway) and it will give you your actual groundspeed, distance to go, true track made good, and time to go to any of them. And, as you proceed, it will indicate any cross track error — the distance off course in hundredths of miles to port or starboard. (This shouldn't be significant, though, if the helmsman keeps the needle of the built-in, variable scale, left/right meter centred. The unit also has outputs to drive a remote repeater left/right indicator).

But if, by accident or design, you happen to get a fair distance off the direct track to the next waypoint, the Internavigator will give you the true bearing to go straight to it.

As you approach the waypoint, an Alert light warns when you are within one mile, and flashes "getting close" at less than half a mile to go. And, if you're in the Auto mode, upon reaching the waypoint all navigation calculations switch over to the next leg. Could anything be simpler?

The Internavigator's controls also include an Operator Error warning (you can't, for example, key in latitudes over ninety degrees), a lost signal light, a display memory "freeze", and a Calculate function which allows you to do other navigation sums via the computer without upsetting the ongoing calculation process.

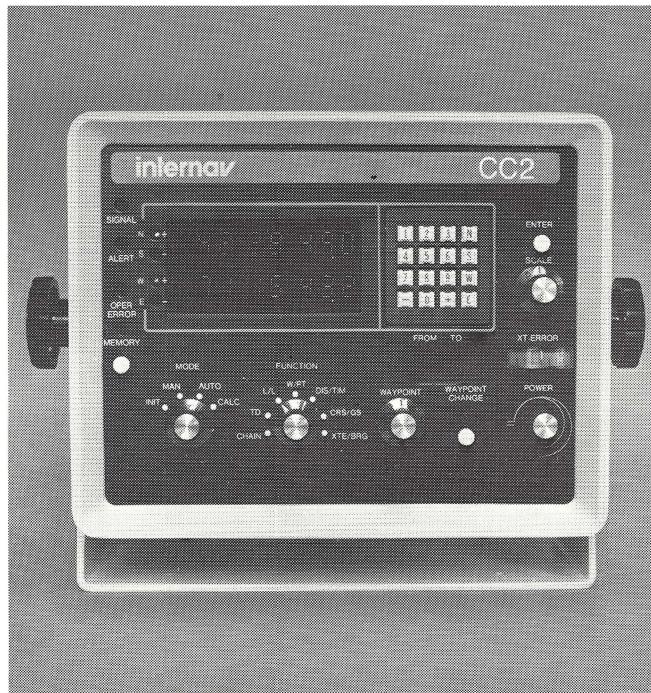

And finally, a unique plus. Thanks to velocity aiding through a built-in least squares recursive filter, Internavigator readouts are smoother than anything you've seen before. So smooth, in fact, that its TD display is actually *more precise* than that of the receiver which is driving it. The CC-2 operates from Internav 101, 104, 204, and 123 receivers, and costs \$4,500. We'd call that a very competitive price — except that we don't seem to have too many competitors.

But that's the way it is, when you're number one in Loran C.

internav

Internav Ltd

Point Edward Marine Park,
Sydney, Nova Scotia B1P 6K3
Phone 902-539-0660

3 PRECISE WAYS TO PROFILE THE OCEAN FLOOR.


1



Fast, portable, battery operated systems—For in-shore operation at depths to 400 ft. with *RTT-1000A Survey System*, or depths to 620 meters with *DSF-600 Digital Survey Fathometer*. Both systems are portable, battery operated and provide a flexible, low-cost source for both high resolution bathymetry and sub-bottom profiling. Bottom triggered TVG eliminates false-triggering from low frequency noise.

3

Speedy channel depth surveys—The Channel Sweep System *DE-719-CSS* is significantly faster than the bar-sweep method of channel depth survey. This portable system operates in most vessels, with only one operator. Multiplexed 200 KHz transducers provide overlapping sonic beams to the recording fathometer to provide sweeping and post-dredging sounding at the same time.

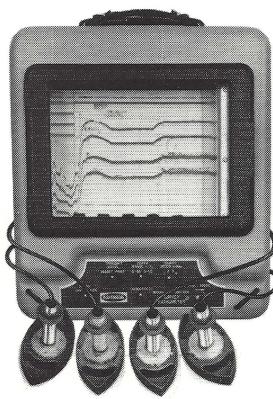

2



Quick, clear profiling printouts—Raytheon's deep water bathymetric system can be as simple or sophisticated as your surveying needs. The basic system consists of Line Scan Recorder *LSR-1811*, precision *PTR-105 Sonar Transceiver* and an appropriate high power transducer for bottom or sub-bottom profiling. Precision Depth Digitizer *PDD-200C* converts analog data to digital for direct computer access or tape storage. *CESP* signal enhancement assures maximum record clarity.

RAYTHEON

All systems reflect the sophistication gained through 70 years of technological innovation in the field of sonar by Raytheon. For complete technical information contact Raytheon Company, Ocean Systems Center, P.O. Box 360, Portsmouth, R.I. 02871, U.S.A. (401) 847-8000, ext. 2646.

**TECHNOLOGY TO HELP YOU
HARNESS THE SEA.**


What's your need?



DATA LOGGING – CAT 8800

Portable Hydrographic Acquisition system collects, edits and records data on DC 300A or DC 100 cartridge tape. Works with essentially any depth or positioning system while steering information and display are optional.

DATA RECORDING – CAT 8900

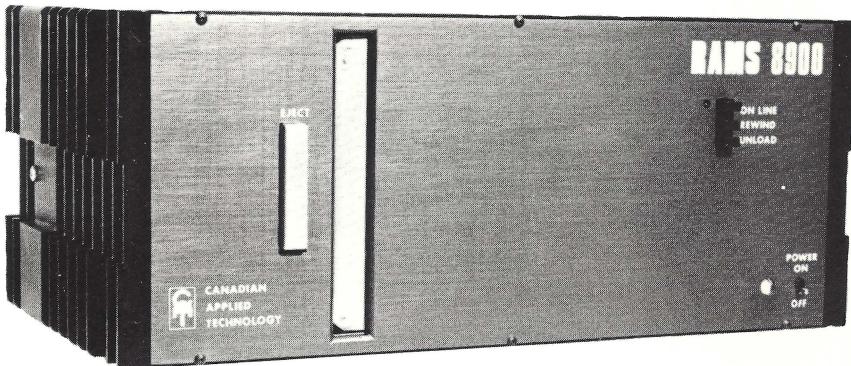

Ruggedized Asynchronous Magnetic Tape system using DC 300A cartridge. Includes an 8085 microprocessor which allows communication via EIA RS232C link reducing host CPU overhead and controlling read-after-write error checking.



For further information contact:

Canadian Applied Technology

Buttonville Airport, 16th Avenue, BUTTONVILLE, Ontario L3P 3J9

Telex: 06-986511

Phone: (416) 297-4681

Introducing the new CAT 2200

TIDAL ACQUISITION AND TELEMETRY SYSTEM

This *proven*, single board, micro processor (8085) system will store accurate measurements of *water level* using a **CAT 2200 digital sensor**. With auto call, modem or radio equipment any location can be monitored *remotely*, and CAT has *add on* hardware for control, *analogue measurements*, or site status monitoring if that's the requirement.

A single 12 volt supply provides power backup. Couple this with a sealed *anodized, welded aluminum* case, and you have a reliable, rugged, *environmentally protected* system.



Use it for *tide level* research, *dredging*, holding pond, *flood level* or shipping lane monitoring. Other applications include rainfall and water temperature measurements. **CAT 2200** does it all!



For further information contact:

Canadian Applied Technology

Buttonville Airport, 16th Avenue, BUTTONVILLE, Ontario L3P 3J9

Telex: 06-986511

Phone: (416) 297-4681

How a little beep can save your mission.

You're on a survey site in the middle of nowhere. When the chopper pulls out, it's just you and your equipment. If you don't get valid data, or if something fails, you've wasted a lot of time and money. Scratch one mission.

Field-Verified Cassette Data.


The MX 1502 Geoceiver makes sure you get valid data automatically. All satellite information is stored in the MX 1502's memory as it is received, then written on cassette tape for post-processing. Automatically, the tape is partially rewound and the entire contents checked

against the memory. You end up with a bit-perfect final recording. If bit-perfect data isn't recorded, an alarm sounds—the beep that tells you to take corrective action in the field.

Accurate, Reliable Data.

The MX 1502 receives satellite signals on two channels to eliminate ionospheric refraction errors. Typical accuracy reaches 0.5 meters in Translocation.

Set up in minutes, the MX 1502 then operates completely automatically. It anticipates and tracks acceptable satellite passes, saving power and

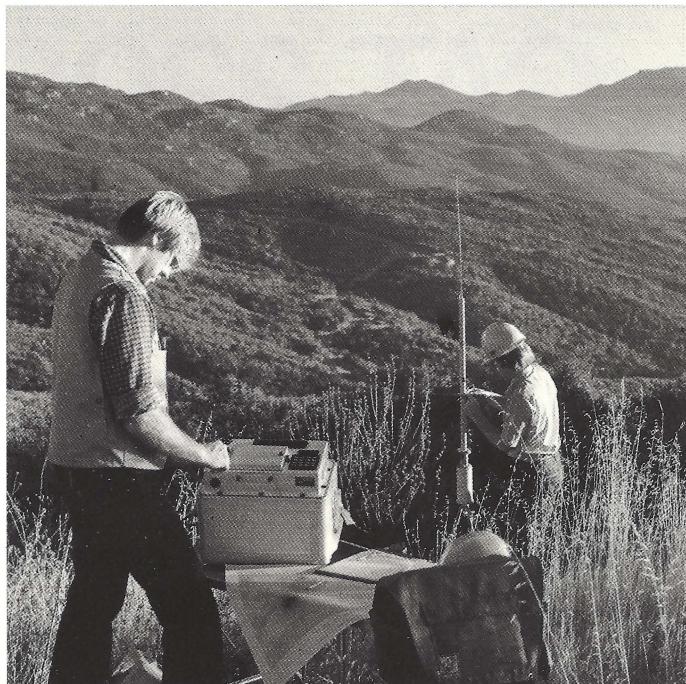

eliminating multiple satellite pass interference. It even tells you when you have sufficient data to meet the specified accuracy of your survey, saving time and needless expense. It self-tests and identifies any questionable circuit board or subassembly—field-repairable in less than 30 minutes.

Mission Accomplished.

The MX 1502 Geoceiver gives you a reliable end result. Accurate geodetic positioning data, verified at the survey site. That's economy in itself. And since the MX 1502 costs less than you might expect, you'll realize cash economies too.

Call your Magnavox agent to hear how a little beep can save your mission. Magnavox Government and Industrial Electronics Co., 2829 Maricopa Street, Torrance, California 90503. Phone (213) 328-0770. Telex 674-373. Cable MAGNAMAR.



Magnavox

Magnavox Government and Industrial Electronics Company.

**SURVEYORS
HYDROGRAPHERS
DREDGE OPERATORS
PIPELINE ENGINEERS**



**MESOTECH'S MODEL 952 SURVEY SONAR
IS A NEW INSTRUMENT YOU SHOULD
KNOW ABOUT.**

EXAMPLE: IN 200 FOOT DEEP WATER, MEASURE BOTTOM PROFILES AND PLOT BOTTOM CONTOURS OVER A 950 FOOT DIAMETER AREA, FROM A SINGLE POSITION.

FEATURES

Narrow beam, high frequency sonar pulses sweep across the bottom to pick out fine detail.

Digital memory records bottom profiles for playback.

Roll compensation allows accurate measurements regardless of vessel motion.

X-Y plotter draws a permanent, four colour record on ordinary graph paper.


Microprocessor electronics.

MESOTECH SYSTEMS LTD.


1174 WELCH STREET, NORTH VANCOUVER, B.C., CANADA V7P 1B2
(604) 980-3474

Total Support sales - service - lease

for your oceanographic / hydrographic /
geophysical equipment needs.

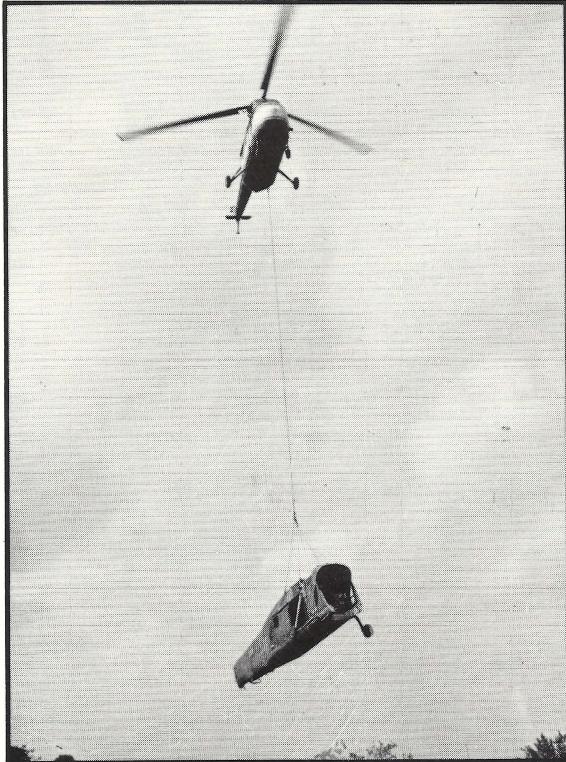

Oceanographic instruments
Positioning systems
Pipeline survey systems
Seismic systems
PHILLYSTRAN mooring lines
Marine hardware and cable
Aquatic samplers
Water quality analyzers

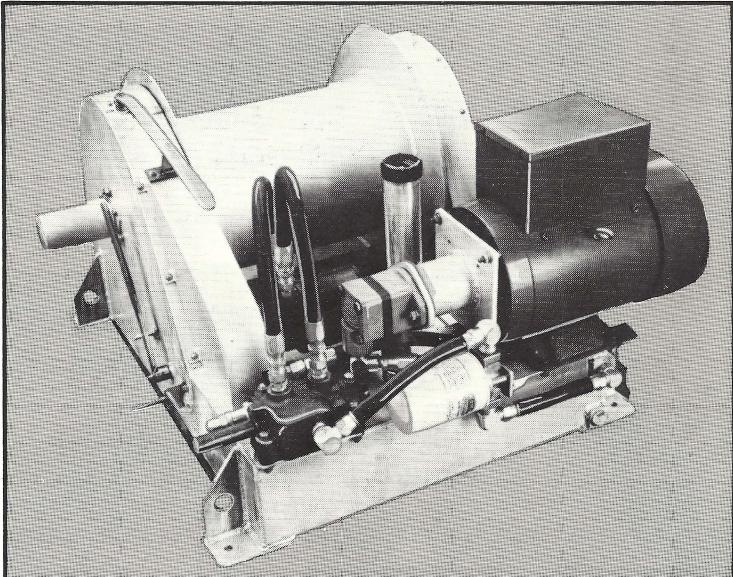

m.s.e. engineering systems ltd.



265 canarctic drive, downsview, ontario,
canada M3J 2N7
(416) 661-5646 telex 065-23982



Producer of:
TORAN
&
DIFFERENTIAL OMEGA

Now introduces

SYLEDIS

- over-line of-sight radio-positioning equipment
- highly portable, low power drain, unattended reference beacons
- no cumbersome antenna arrays
- no lane count 10 km ambiguity
- 24 hours-day operation


SERCEL ELECTRONICS OF CANADA Ltd.
7004 V 5th Street SE
Calgary, Alberta T2H 2G3
Phone: 403/253-2148 - Telex: CGY 03-824738

SERCEL INDUSTRIES CORP.
Koll Business Center, Building 13
2871 152nd Avenue N.E.
Redmond, Washington 98052
Phone: 206/885-5585 - Telex 32-9434 Sercel RDMD

SERCEL INCORPORATED - USA
Suite D10, 4800 West 34th
Houston, Texas 77018
Phone: 713/688-9433 - Telex: 775689

SERCEL
SOCIÉTÉ D'ÉTUDES, RECHERCHES
ET CONSTRUCTIONS ÉLECTRONIQUES
25 X-44090 Nantes Cédex
Phone: (40) 49.11.81 (7 lignes groupées)
Telex: Sercel CARQF 710695

**SERCEL
ALWAYS FIRST,**

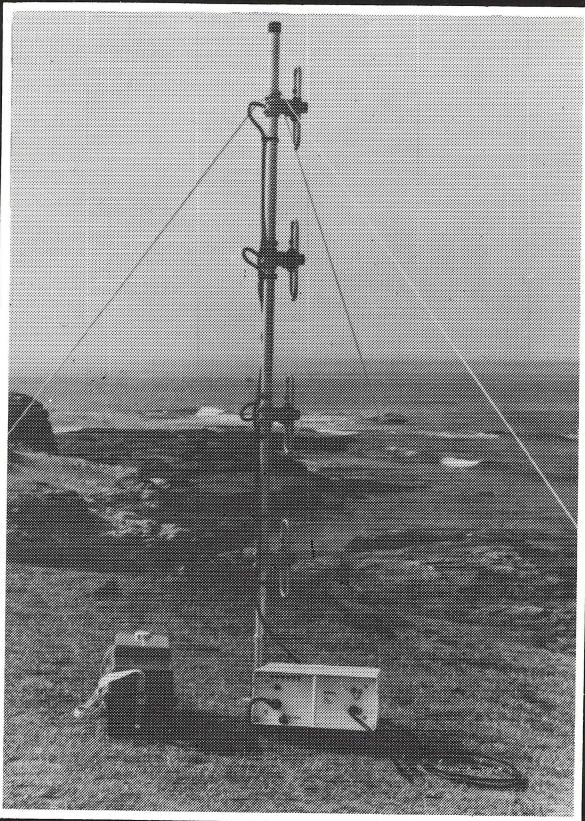

THE HYDROGRAPHIC PACKAGE !



BATHYMETRY

ATLAS-DESO 10 Dual Frequency Survey Fathometer
ATLAS-EDIG 10 DIGITIZER

POSITIONING

MOTOROLA MINI-RANGER III C-BAND
This system includes BITE (Built-in Test Equipment), Multi-User Option, 16 code option and rotating antenna for extended range, thermo-electric power for remote transponder sites.

NAVIGATION

HP-9825 converts range - range in real time to UTM and controls fiducials for all peripheral systems.
HP-9871 Printer-Plotter for track plotting and field Data Logging.
Remote Visual Survey Track Monitor.

HP-59309A Master Control Clock for all systems. Bathymetric and Positioning Data can be digitally recorded at selectable intervals and is automatically processed and plotted aboard ship. A post-mission computer controlled Bathymetric contouring package is also available.

ADDITIONAL SERVICES AVAILABLE:

Piston Coring (Benthos and Alpine)
Side Scan Sonar (Klein and EG & G)
Bottom Sediment Sampling Systems.
Marine Seismic Profiling Systems (EG & G Uni-Boom and 240 Sub-Tow, Huntac Hydrosonde, Raytheon RTT-1000A.)

KENTING

KENTING EXPLORATION SERVICES LIMITED

5636 Burbank Cres. S.E., Calgary, Alberta T2H 1Z6 (403)253-6633 Telex 038-22630



DO YOU CATCH A BOAT TO WORK?

If you do you will be better informed as a member of the HYDROGRAPHIC SOCIETY and a reader of the HYDROGRAPHIC JOURNAL.

THE HYDROGRAPHIC SOCIETY

The Hydrographic Society was formed to further the interests of all those concerned with surveying at sea. Its membership is international and broadly based, in order to unite surveyor, equipment manufacturer and client. Over 40 Corporate Members and 500 surveyors, engineers, geologists and geophysicists from more than 30 countries now enjoy the benefits of membership.

The Society offers a variety of services to members, including a Journal, Information Sheets at approximately two-monthly intervals, Special Publications, Symposia, lectures and an employment information service.

THE HYDROGRAPHIC JOURNAL

As the forum of the Hydrographic Society, the Journal provides a medium wherein the knowledge, experience and views of individuals, firms, and organisations engaged in the profession of surveying at sea can be published. It also records the activities and functions of the Society.

Three issues per annum.

The options are:-

Full Individual Membership — £2 joining fee and £7.50 p.a. (Journals and Information Sheets supplied free, by airmail).

Full Corporate Membership (for organisations) — £20 joining fee and £40 p.a.

Subscriber (non member) —
£15 p.a. plus postage (Journal)
£21 p.a. plus postage (Journal and information sheets)

For further information and membership applications write to:-

Hon. Secretary
The Hydrographic Society
Department of Land Surveying
North East London Polytechnic
LONDON E17 4JB

For Journal subscription write to:-

Subscription Secretary
67 Kingtree Avenue
Cottingham
North Humberside
HU16 4DR

HYDROSONDE

deep-towed seismic system

delivers: **Performance**

- Operation in Beaufort State 7
- Survey Speed to 6 knots
- **Effective** motion compensation derived from depth, acceleration, pitch, and roll sensors ensures record quality


Data

- 0.25m resolution capability
- better penetration from unique high resolution pulse
- System precision enables digital processing of seabed echoes

Reliability

- Proven in 4 years operations on east coast North America, Arctic and North Sea conditions
- Continuous 24 hour operation

The Huntec Deep Towed Seismic System is a high resolution seismic data acquisition system. Towed underwater and producing a unique motion-compensated, pressure-compensated output, it delivers precise information on surficial seabed geology. Deep-Tow is available for purchase or on a contract basis worldwide.

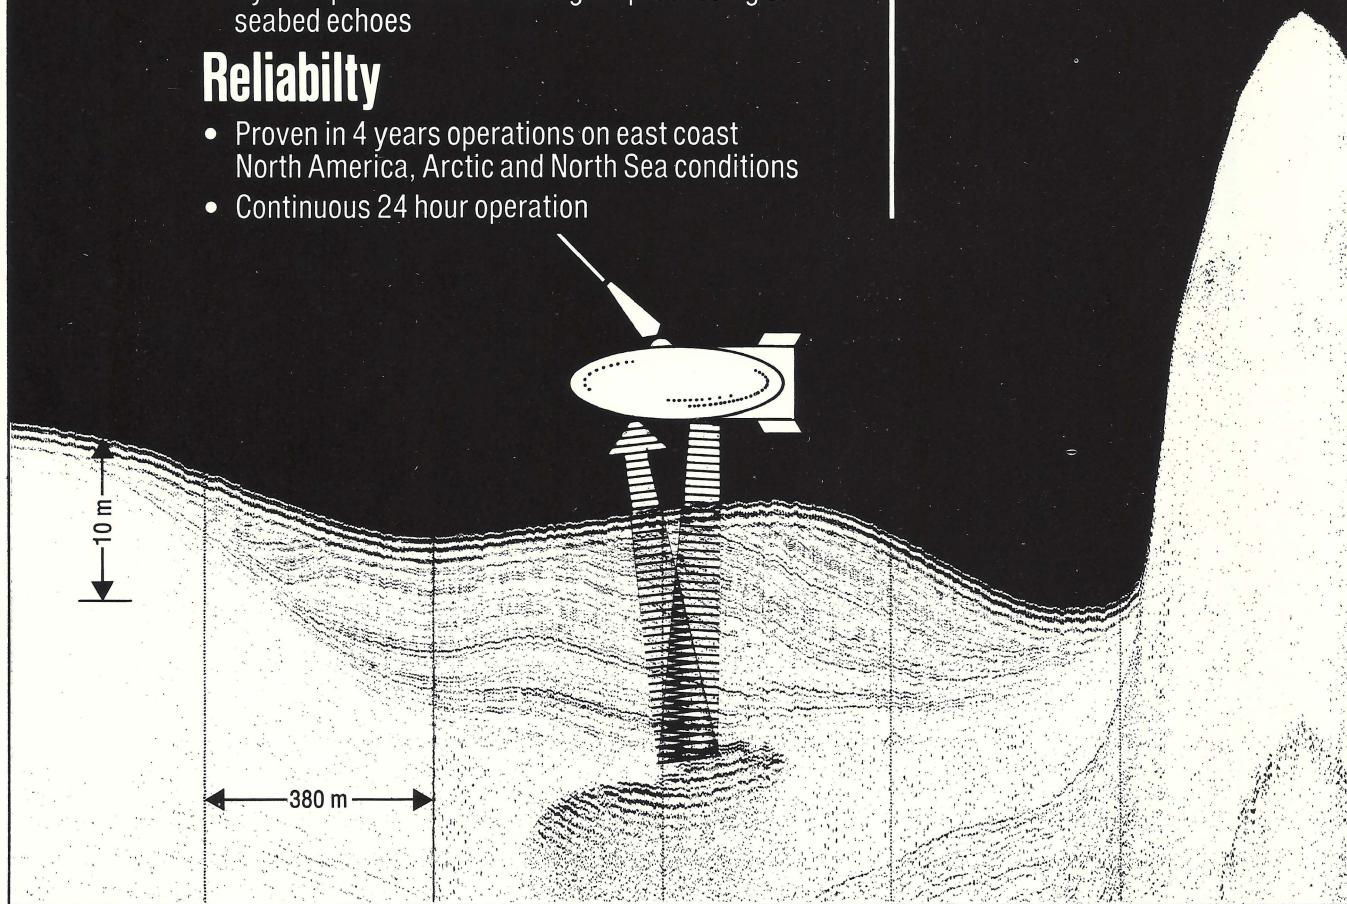

huntec
(70) LIMITED

25 Howden Road, Scarborough,
Ontario, Canada M1R 5A6
Phone: (416) 751-8055
Telex: 06-963640
Cable: HUNTOR, TORONTO

**Let Huntec deliver
your data...**

JOURNAL OF THE CANADIAN HYDROGRAPHERS ASSOCIATION

National President	<i>G. Macdonald</i>
Secretary-Treasurer	<i>B. Tinney</i>
Vice-President, Atlantic Branch	<i>K. Malone</i>
Vice-President, Ottawa Branch	<i>J. Bruce</i>
Vice President, Central Branch	<i>R. Chapeskie</i>
Vice-President, Pacific Branch	<i>B. Lusk</i>

Editorial Staff

Editor	<i>B. J. Tait</i>
Assistant Editors	<i>R. M. Eaton</i> <i>R. W. Sandilands</i>
Graphics	<i>C. J. Elliott</i>
Financial Manager	<i>E. Brown</i>

LIGHTHOUSE is published twice yearly by the Canadian Hydrographers Association and is distributed free to its members. Subscription rates to non-members are \$3.00 per single issue or \$6.00 yearly.

All correspondence should be sent to the Editor, **LIGHTHOUSE**, c/o Canadian Hydrographers Association, 867 Lakeshore Rd., P.O. Box 5050, Burlington, Ontario L7R 4A6.

LIGHTHOUSE

Advertising Rates Per Issue

Full page -	outside back cover	\$125.00
	inside cover	\$115.00
	body	\$100.00
Half page -	inside back cover	\$75.00
	body	\$65.00
Quarter page -	body	\$40.00
Professional Cards		\$25.00

Sizes : full page (7x10); half page (7x4 $\frac{7}{8}$); quarter page (3 $\frac{3}{8}$ x4 $\frac{7}{8}$)

Deadlines for submissions : April Issue - February 15th.
November Issue - September 15th.

For information contact Mr. B. J. Tait (Advertising) Phone (416) 637-4346

Contents

Page

Whose Name Was Writ in Water

1

R. W. Sandilands

The Mini-Ranger Data Processor
Automated Positioning System-
A Useful Tool for Positioning Sweeps

7

M.V. Woods

Cushy Shore Jobs

11

Municipal Place Names and Hydrographers

12

David Monahan

Book Review

13

Notes

14

Letters to the Editor

16

News from C. H. S.

18

News from Industry

19

C. H. A. Personal Notes

20

*Views expressed in articles appearing in this publication
are those of the authors and not necessarily those of the
Association.*

INTERNATIONAL HYDROGRAPHIC BUREAU

Avenue Président J.F. Kennedy, Monte-Carlo, Monaco
publishes

twice a year, in January and July
an English and a French edition of

THE INTERNATIONAL HYDROGRAPHIC REVIEW

This publication contains articles of topical interest on hydrography, oceanography and related ocean technology and sciences.

Approx. 160 pages, 18 x 27 cm; numerous illustrations.

Annual subscription: 110 French Francs, plus postage.

Original articles for publication are welcome.

The Bureau also publishes monthly

THE INTERNATIONAL HYDROGRAPHIC BULLETIN

which contains topical news and reports the work of the world hydrographic community. Charts and publications issued by Hydrographic Offices are listed each month, and there is a comprehensive monthly bibliography on hydrography and related subjects.

Bi-lingual (English & French), approx 35 pages 21 x 30 cm.

Yearly subscription: 60 French Francs, plus postage.

Individual issue: 6 Francs. Free specimen copy on request.

The list of International Hydrographic Bureau publications, and the conditions of sale, will be supplied free on request.

Telegraph: BURHYDINT MONACO

Telex: (France) 469870 MCS CARLO (Attn : INHORG)

Whose Name Was Writ In Water

(A Short History of the Challenger Expedition)

R. W. Sandilands

Canadian Hydrographic Service
Pacific Region

The corvette HMS *Challenger* steamed out of Portsmouth on the morning of 21 December 1872, passed through the Needles and down Channel into a smooth sea with only a light headwind. The first leg of her course was laid to Portugal.

The second day brought gales and heavy seas. A contemporary diary contains the following quote:

"A Merry Christmas and A Happy New Year" was amongst the last words I heard on leaving England. Vile mockery. Here we have been kicking our heels about for the last six days in the chops of the Channel...for we can not make good any distance towards Lisbon. South-westerly gale follows south-westerly gale...and all we can do is to lay to and let it blow on. Christmas Day was duly celebrated with roast turkeys, plum puddings and hot grog but we had to hang on to our grub pretty stiffly for everything had a tendency to make for the lee side of the place there to revel in sublime smashery and confusion. At breakfast the same day it was a perfect impossibility to keep your seat at all, and it was necessary to seize what you required from the side tables and transfer it to your mouth before it was sent flying out of your hand and our dogs kept up a delightful chorus of howls and yelps, by which they gave us to understand that they did not like it."

What was the reason that caused scientists to volunteer for such a voyage?

Since the voyage of Darwin some thirty years earlier British naturalists had become increasingly interested in the animal and plant life of the seas. Reason predicted that life in the sea was certainly confined to the upper zones. For years it was generally believed that about 300 fathoms was the depth limit for life. Below that the depths were too cold, there certainly was no light thus precluding plant life and the pressure of several tons per square inch was unbearable. But not all agreed. This was the era of telegraphic communications, of under water cables and in 1860 a cable was retrieved for repair from 1,200 fathoms and was found to be heavily encrusted with corals and other animal growth clearly seen to have been alive for several years on the cable.

During the nineteenth century the Hydrographic Department of the Admiralty had become increasingly professional. Hydrographers were initially serving Officers who were seconded for limited periods but during the tenure of Rear

Admiral Beaufort, they became specialists who spent their entire lives in this branch of the Navy. The accuracy of their surveys was equalled by the care with which their charts were printed for world wide circulation. Scientists were appointed to surveying vessels, frequently as surgeons, to gather information additional to that acquired by the hydrographers. Darwin sailed on the *Beagle*; Huxley was a surgeon on *Rattlesnake* in New Guinea, Hooker, the Botanist was surgeon with *Erebus* and *Terror* in the Arctic. Their journals, professional papers and reports excited the scientific community in Britain. However, it was evident that something more than the small ventures of individual researchers was required.



Dr Carpenter

Early in the summer of 1871 Dr. Carpenter of the Royal Society called on Her Majesty's government not to allow Britain's lead in marine science to go by default. News had come from the United States of a projected cruise by Agassiz in the Atlantic and Pacific oceans. The Germans were planning and expedition in the Atlantic and Sweden had sent two ships to the Arctic. He pointed out that if an opportunity were not found for following up the discoveries already made it would be a blow to national prestige and unfair to the scientists whose efforts had given the country its commanding position.

As early as 1869 he had had the idea of persuading the government to send out a voyage of circumnavigation which would take the techniques and concepts developed in minor projects and put them to work in the oceans of the world.

The British Association for the Advancement of Science met in Edinburgh in August 1871 and there resolved to co-operate with the Royal Society "For the promotion of the circumnavigation expedition specially fitted out for carrying the physical and biological exploration of the deep-sea into all the great oceanic centres".

By October the Association had a letter

committing the government to "Support an expedition on receipt of a formal application from the Royal Society".

A committee consisting of among others, Carpenter, Richards, (Hydrographer of the Navy), Wyville Thomson, T.H. Huxley and Hooker, was struck and met on November 10th---specifications were drawn up, were modified and a brief submitted.

The estimates were approved in mid-December and placed before Cabinet shortly afterwards. This initial consideration was the first and last time that the expedition was discussed at the highest level and the act by which Britain led the world into the realm of oceanography received only the most cursory attention of its leaders. The Treasury approved the sum of £ 40,205 over three and a half years. If only governments could respond as quickly today. But it is clear that much of the ground work done by Carpenter was of crucial importance. Recent research has shown how he was able to use his social contacts with Gladstone and his Ministers to get the idea of the voyage accepted with the minimum of delay.




Admiral G.H. Richards RN

At the Admiralty the Hydrographer was ready. Admiral Richards, recently returned from surveys in British Columbia, as a member of the committee had had a hand in drafting the request. He had narrowed his list down to two ships, both laid up at Sheerness.

One was *Clio*, the other *Challenger*. The choice was left to the Naval Secretary and on December 18th Captain Hall suggested that *Challenger* was the more suitable vessel.


She was a three masted, square rigged, wooden ship of 2,300 tons displacement and 226 feet overall, with a 30 foot beam. Officially described as a steam corvette she was powered by an engine of about 1200 horse power but still essentially a sailing ship. She was built at Woolwich and launched in 1858 and had served in

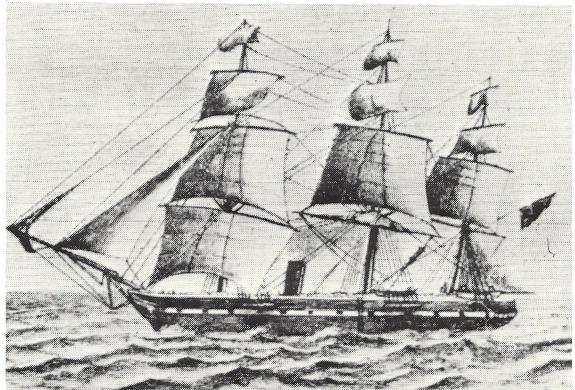

HMS CHALLENGER

Vera Cruz and in the Fiji Islands. She was extensively refitted for her new role. All but two of her 18 main deck 68 pounders were removed and this space along with that normally housing stores and ammunition was turned to extra accommodation and laboratory space.

Nearly the entire main deck was given over to a biological laboratory, adjacent to it was a well stocked reference library and a chemical laboratory where the sea water was analyzed. A photographic dark room and studio were fitted as well as an aquarium though the latter was not to be too successful.

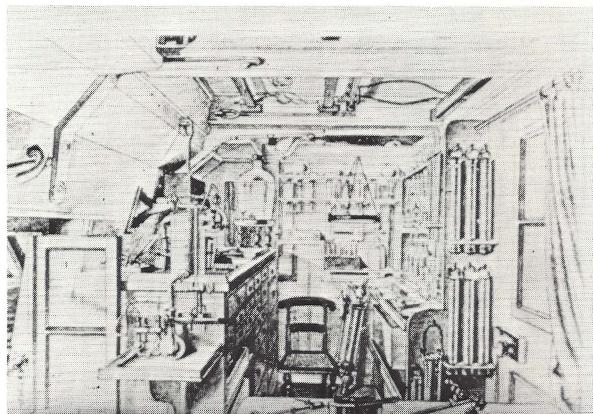

The Chemical Laboratory

A large steam winch of 18 horse power was fitted on deck for dredging and sounding using the main yardarm as a boom over the same. For sounding there were 25,000 fathoms of rope, for dredging 10,000 fathoms each of 3" and 2½" line as well as 5,000 fathoms of 2" hemp.

Although Kelvins wire sounding machine had been developed, hemp was still used for sounding as the wire snarled badly and was not to be trusted at times when both heavy water-sampling-bottles and thermometers were attached along with the sounding weights.


Admiral Richards then turned himself to the task of choosing a suitable commanding officer and his choice fell on Captain George Nares, an Aberdonian, and an Arctic explorer of distinction.

His second-in-command was Command MacLear and as navigating officer Lieutenant T.H. Tizard. In all there were about 20 naval officers and a crew of over 200, the total number onboard on sailing being 243.



Captain G. Nares RN

Though Dr. Carpenter of the Royal Society had been the first proponent of the cruise, by 1871 at the age of 58 he felt he was past the age to go to sea on an arduous voyage, even if his prickly personality had not stood in his way. The expeditions leadership was therefore offered to Professor Wyville Thomson, Professor of Natural History at Edinburgh University, and Carpenter's junior by 16 years. The Royal Society chose as his assistants John James Wild, a young man of Swiss nationality to act as secretary and artist. As naturalists Henry Moseley, Professor of Human and Comparative History from Oxford University, Dr. Stirling, from Edinburgh University who resigned before the expedition sailed and as third choice a young Canadian with no degree, John Murray.

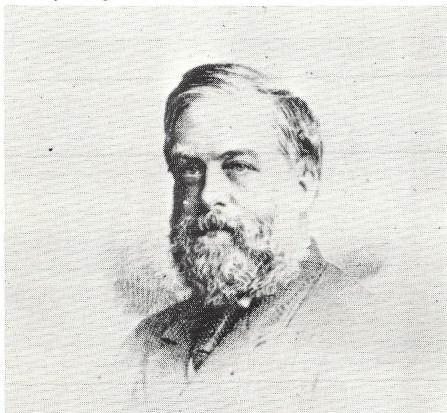

Sir Wyville Thomson

Murray was born in Ontario and initially came to Edinburgh to study medicine. However, he

soon became interested in the field of natural history and showed no respect for the tedious discipline of examinations and no wish to acquire the decoration of degrees but worked at any subject which interested him. He was the only naturalist who had been at sea prior to the expedition, having sailed as surgeon in the whaler *Jan Mayen* to the Arctic.



Sir John Murray

As a replacement for Stirling a young German zoologist who impressed Thomson when they met in Edinburgh in October '71, Rudolph von Willemoes-Suhm became the third naturalist. This young man was not to survive the voyage, dying of erysipelas as the *Challenger* was approaching Tahiti in September 1875.



Rudolph Von Willemoes-Suhm

To round off his team Thomson added a non-commissioned officer from the Royal Engineers to be his photographer.

These then were the men who were to write their name in history as the members of the first great oceanographic cruise.

The weather moderated after they had crossed the Bay of Biscay and once past Finisterre and into calmer seas they began to practice the strange, arduous and monotonous exercise that was to become their routine throughout the next three and a half years.

A typical day would begin at 0530. Steam was raised during the night and under steam and assisted by a spanker, the rest of the sails being furled, the ship was put head to wind. The depth was determined by sounding and as soon as the line was returned the thermometers were read, the water samples taken to the laboratory for analysis and the bottom sample collected from the tube. The ship then bore off before the wind and the trawl was lowered over the side. A beam trawl was preferred because it swept the bottom thoroughly bringing back a larger collection of fish and swimming creatures. A dredging day or drudging day as the crew preferred to call it, took from ten to twelve hours and excitement ran high when the trawl was landed onboard. Who knew what wholly new creature, what fossil or form long thought extinct would come tumbling on deck. Many strange, bizarre and grotesque animals were brought out of the depths, most of them never seen by man before.




Working the Dredge

Sub Lieutenant Lord George Campbell gave the following description of the routine after two years.

"On the average we sound something like every two hundred miles and as this old tub does not average more than one hundred miles a day, we stop every other day. Sometimes we trawl every time we sound, sometimes we skip one trawling. Sounding, taking serial temperatures to 1,500 fathoms, at every ten up to 200 fathoms, then only at every hundred, getting specimens of water at intermediate levels etc., takes about seven or eight hours. And it is no use arguing that this work is our *raison d'être*; we know that too well...but we should be more than mortal if after two years of this same old grind we did not---but Bah! A splendid ship, a splendid cruise, romance, how interesting etc., etc., but Hey for the *Challenger* and may we soon see the last of her!"

But there were moments of great beauty and moments of danger in this routine life. In mid-February of 1874 the first icebergs were sighted and Campbell recounts "No words of mine

can describe the beauty of these huge icebergs. One which we have just sailed past had three high caverns penetrating a long way in, with the wonderful colouring of those blue caverns and white cliffs, dashed with pale sea green, stratified with thin blue lines veining the semi-transparent wall of ice 200 feet in height" and on the 16th February at about 1300 *Challenger* crossed the Antarctic Circle, the first crossing of the circle by a steamship. (The first recorded crossing being made by Captain Cook in 1773 and later, on turning north, young Vancouver ran forward to the bowsprit and claimed to have been further south than any other man).

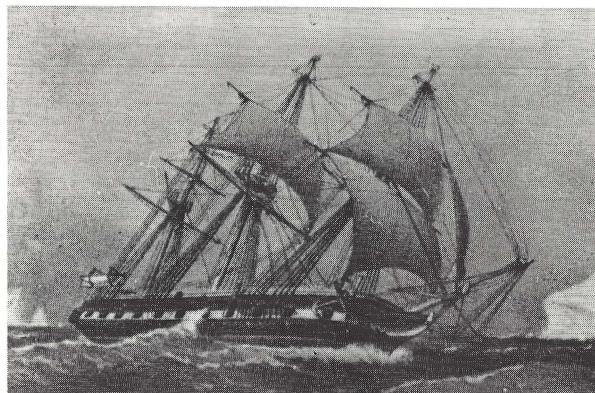

HMS CHALLENGER meets the icebergs

Eight days later the wind approached gale force and a heavy snow squall brought decreased visibility. Suddenly a hail from the fo'castle lookout "Iceberg close under the lee bow!". There was no room to steam ahead, the order was given for full astern, the lower deck was cleared, the maintopmen went aloft to loose the main topsail, the foretrysail was taken in to assist the engine reversing. The shouted commands were barely heard over the roar of the wind. The weather clew of the main topsail was set aback, headsails were taken in...and the *Challenger* slowly gathered sternway under the towering mass of the berg. Two days later there were forty bergs in sight around them and the Edinburgh naturalists may have remembered the memorable couplet in McAndrews Hymn:

"Hail, snow and ice that praise the Lord,
I've met them at their work, an wished we
had another route, or they anither kirk".

The life of the seamen was a hard one. During the cruise some 61 deserted, mainly in Australia, though Thomson's photographer jumped ship at the Cape reportedly because of the Kimberley goldfields. Seven men died onboard during the three and a half years *Challenger* was away from U.K. The first was a boy called Stokes who was killed by a heavy block falling on him when a line broke due to the dredge snagging on broken ground. Two others were drowned, one killed himself with chloral hydrate, another with an excess of alcohol and two more, including von Willemoes-Suhm succumbed to illness. Two men went insane and twenty-six were hospitalized or

invalided, malaria, syphilis and consumption in that order being most prevalent. Scurvy was entirely absent. Others were called home along with Captain Nares from Hong Kong to join an Arctic expedition and only 60% of the original complement stayed with the ship for the entire cruise.



Captain Thomson RN

Captain Thomson assumed command in Hong Kong when Nares went back to U.K. and the voyage continued.

For those of you who are statistically minded the *Challenger* logged 68,890 nautical miles. She spent approximately 40% of her time in port but during these visits the scientific staff were busy engaged in the surveying and in the examination of the flora and fauna of the area.

The deepest sounding recorded was 4,575 fathoms in the Marianas Trench now called Challenger Deep. The greatest depth at which she took living animals was 3,125 fathoms about 1,000 miles north of Honolulu. She spent 736 days at sea and obtained over five thousand new specimens of fish and invertebrates and conclusively proved that the deep-sea fauna was relatively recent and not merely a collection of living fossils surviving from ancient eras. Protozoa and diatoms were also abundant yielding about 5,000 species most of them new to science.

Sir John Murray later wrote "It may fairly be said that since the discoveries of Columbus, Gama and Magellan in the thirty years from 1492 to 1522 no addition to the knowledge of the surface of our planet can compare with that acquired by the *Challenger*". Never had a research project discovered so many new forms of life.

During the voyage *Challenger* occupied 362 oceanographic stations. The position of these stations having been ascertained the following data was obtained.

The exact depth was recorded, the bottom

temperature was obtained and a sample of the bottom was recovered. A sample of the bottom water was taken for analysis and a fair sample of the bottom fauna obtained. At most stations the fauna of the surface and intermediate depths were sampled and temperature and sea water samples for intermediate depths recorded and analysed. In all cases meteorological and atmospheric conditions were noted, the surface current rate and direction recorded and at a few stations an attempt was made to ascertain the rate and direction of movement of water at different depths.

There were those who opposed the expenditures involved in the expedition but while cruising in the regions adjacent to Java the nets of the *Challenger*'s dredge collected some bits of phosphate. Murray was convinced that they had been formed on land and subsequent search for their origin under his auspices led to the discovery of the phosphate deposits on Christmas Island. The island was annexed to Britain and a company under Murray's presidency developed a highly prosperous mine. Some years before his death this company had already paid the crown more in royalties than the entire cost of the *Challenger* expedition.

In recent years we have read of the interest in manganese nodules in the ocean and the possibility of mining for them. These nodules were first found by *Challenger* between Honolulu and Tahiti in 1875 when a days dredge brought up from 2,350 fathoms more than half a ton of manganese nodules which filled two casks...the great majority were small and nearly round with a mean diameter of three quarters of an inch...incidentally among the nodules were counted 250 sharks teeth this detritus of a marine dental workshop encased forever in protective manganese.



CHALLENGER samples at the British museum

Challenger docked at Spithead on the 24th May 1876 laden with thousands of jars of pickled specimens, muds and clays and other deposits from the sea bed as much again having been forwarded

from various ports of call during her cruise. She also carried records of enormous numbers of observations of temperature, weather conditions, salinities and magnetic observations.

A Challenger office was established in Edinburgh with Sir Wyville Thomson, who had been knighted after the return of the expedition, as Director of The Challenger Expedition Commission. With Thomson as editor, the monumental work of producing the report, eventually fifty volumes, was got under way. It was not completed till 1895 though Thomson himself died in 1882 and Murray was responsible for the final publication, partly at his own expense. Until his tragic death in an automobile accident near his home in Wardie, Edinburgh in 1914, Murray was literally the centre of world oceanography. In 1884 he established a small marine laboratory at Granton, now part of Edinburgh and eventually moved this to Millport on the Isle of Cumbrae in the Clyde. From this rose the Scottish Marine Biological Laboratory which later moved to near Oban. Today no major maritime nation is without at least one such centre of marine research.

The make-up of the oceans has changed little since Challenger's day but the ocean remains largely unknown with only a small percentage of the total adequately surveyed by the various disciplines engaged in oceanography. The

untold wealth of the oceans resources await the nation that has the foresight to carry out these surveys. With her three ocean sciences institutes and an active marine science programme being carried out by the federal government, Canada is placing herself in the running in the ocean stakes.

Bibliography

Linklater E. *The Voyage of the Challenger*
John Murray Ltd. London 1972

Shenton E.H. *The Challenge of the Challenger*
USNI Proceedings Annapolis August 1968

Stewart H.B. Jnr. *A New Look at the Challenger Expedition*
Sea Frontiers Vol. 20 No. 6 Miami 1974

Thomson C.W. and Murray J. *Report on the Scientific Results of the Voyage of HMS Challenger, 1872-76*
HMSO London 1895


The Challenger Expedition Centenary 1872-1972
Exhibit brochure
Royal Scottish Museum Edinburgh 1972

Marinav
CORPORATION

a Canadian Company with a totally integrated offshore survey and engineering capability offering the following:

SERVICES

- Hydrographic, oceanographic, oil rig, pipeline and cable route surveys
- Offshore engineering and high resolution geophysical surveys
- Contract position fixing services
- Design development and manufacture, marine systems
- Cartographic, pre and post plot services and data processing
- Satellite survey services

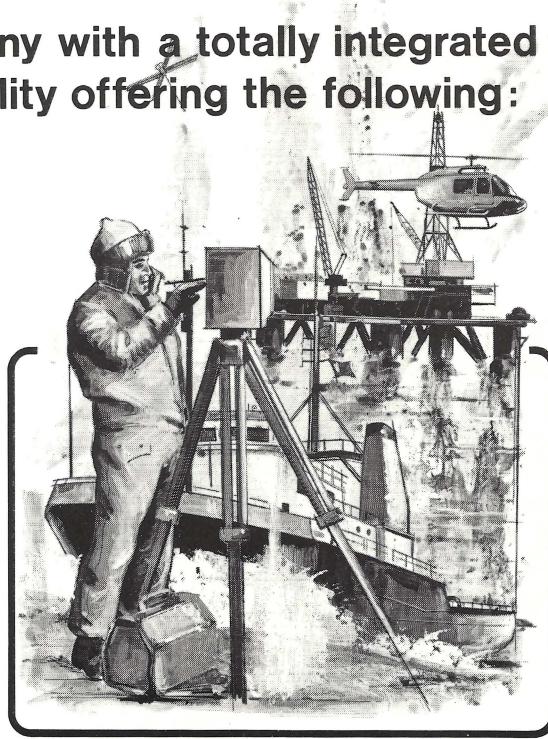

PRODUCTS

- Atlas precision survey sounders
- Decca survey systems
- Del Norte trisponder systems
- Edo Western side scan sonar, profilers and underwater T.V.
- Magnavox satellite navigation equipment
- Data acquisition and communications
- Grabs, corers and samplers

The Mini-Ranger Data Processor Automated Positioning System— A Useful Tool for Positioning Sweeps

M. V. Woods

Canadian Hydrographic Service
Pacific Region

Introduction

The possibility that Kitimat, B.C. might become an oil port led the Canadian Hydrographic Service to initiate, in 1977, their first side scan sonar sweep conducted on the West Coast. The primary purpose of the survey was to determine that the channels leading to Kitimat were indeed deep enough to accommodate large tankers (Figure 1). A basic requirement of this sweep was to accurately position the side scan towfish in order to maintain precise distance between overlapping beam patterns, thus covering the area to a pre-determined depth and leaving no gaps in the sweep pattern (O'Connor, 1977 and Woods, 1977). The Motorola Mini-Ranger Data Processor, Automated Positioning System (MRDP) was selected for the job because it provides continuous steering information, an on-line plot, and X-Y position output so that the exact spacing of lines can be checked quickly (i.e. - what maximum distance apart was the fish along any two lines?).

The positioning system data processor is normally used with the Mini-Ranger III, but since C.H.S. Pacific Region had a Mini-Ranger I available for this job it was possible to lease the peripherals and modify the Mini-Ranger to provide the range - range data to the system. The positioning system and the side scan sonar were installed aboard the 20-metre survey vessel Richardson in such a way that the towfish winch controls, side scan recorder, echo sounder and positioning system were all within easy reach of one operator in the wheel house. This arrangement provided excellent communication between the hydrographers and crew at all times.

The Navigation Equipment and Function

The Mini-Ranger Data Processor Automated Position System consists of:

- i) *Positioning System:* Normally the Mini-Ranger III is used here. In our case the MRS I was used to provide range - range data to position the vessel.
- ii) *Mini-Ranger Data Processor:* The brains of the system, the processor, converts range - range data to X-Y co-ordinates and controls the other components of the system to provide steering information for the helmsman.
- iii) *The Data Terminal:* A Texas Instruments 733 ASR terminal permits the output of time, position and depth* on paper tape and a cassette recorder.

*(The system would normally be connected to an echo sounder digitiser but during our use no digitiser was available.)

- iv) *Track Plotter:* The plotter provides on-line plotting of ship's track and, optionally, a post plot of depths.
- v) *Track Indicator:* This is a small package easily mounted in front of the helmsman which shows distance off line and percent of distance travelled along a line by means of bar scales. The zero of the lower scale defines the start of the line, and 50% shows that one-half of the line has been covered (Figure 2). The steering meter has 5 divisions each side of centre and can be set for fine or coarse steering where each division can equal 5, 20 or 80 units (normally metres). When getting on line the coarse scale was selected so that the unit would respond as soon as the vessel came within $5 \times 80 = 400$ metres of the line and, when on line, the fine scale is used for precise steering. Once the crew became used to the steering indicator, the position output along lines varied only 1 to 3 metres, with numerous fixes computed as being exactly on line.

Operating the System

Pre-Planning

Prior to the use of the MRDP positioning system the data to be entered via the terminal must be recorded in a suitable format. The parameters required are:

1. Height of transceiver above datum of survey.
2. Co-ordinates and elevations of transponders.
3. The correct codes of each transponder to be used.
4. Co-ordinates of start and end of basic survey lines to be run. Here the computing ability of the MRDP is a great time saver as many parallel offsets may be run from one defined line, so the co-ordinates of each line actually covering the work area don't have to be determined, just one line with so many parallel offsets (Figure 3).
5. Position of the vessel with regard to which side of the baseline the work area lies. This is required to solve the dual position problem where the two ranges could be plotted on either side of the baseline and is handled simply by asking the operator to specify a a right and left side for each pair of transponders. Right and left are determined by the operator being at the start of the line, looking toward the baseline.
6. Sample intervals and print ratio. These determine the amount of data the unit will record. The sample rate is set at 2 seconds which means that the system will record time,

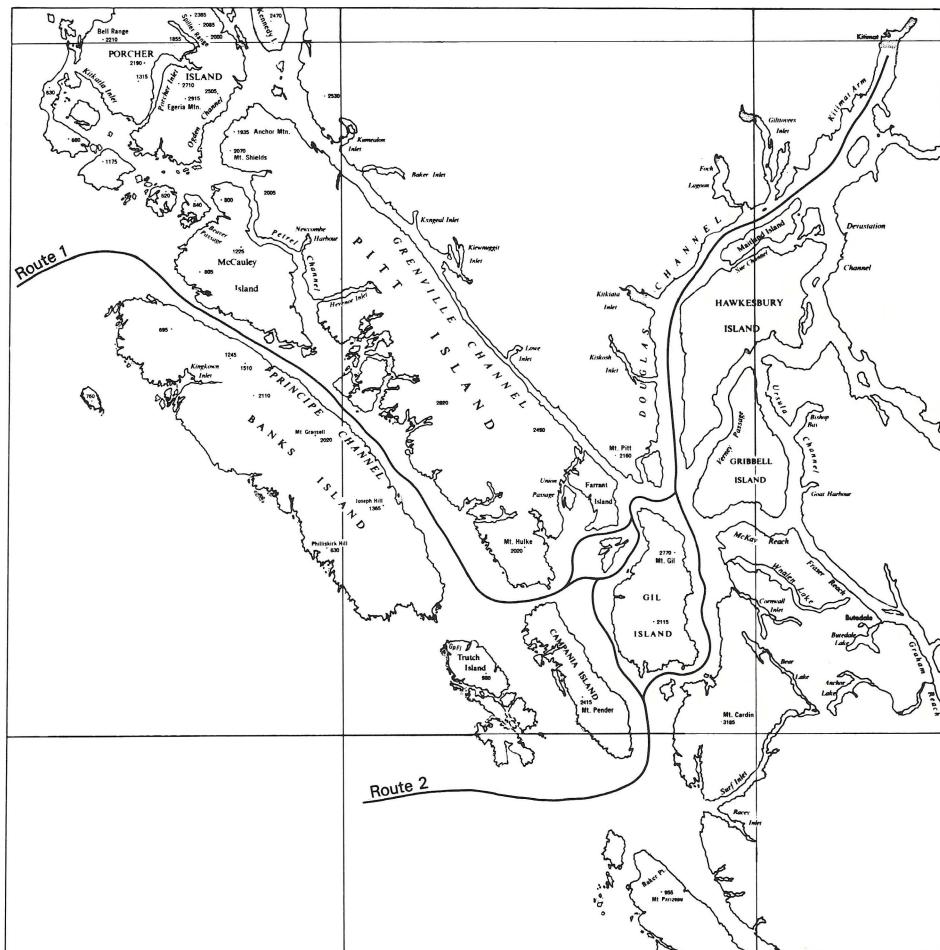


Fig. 1 Proposed Routes to Kitimat

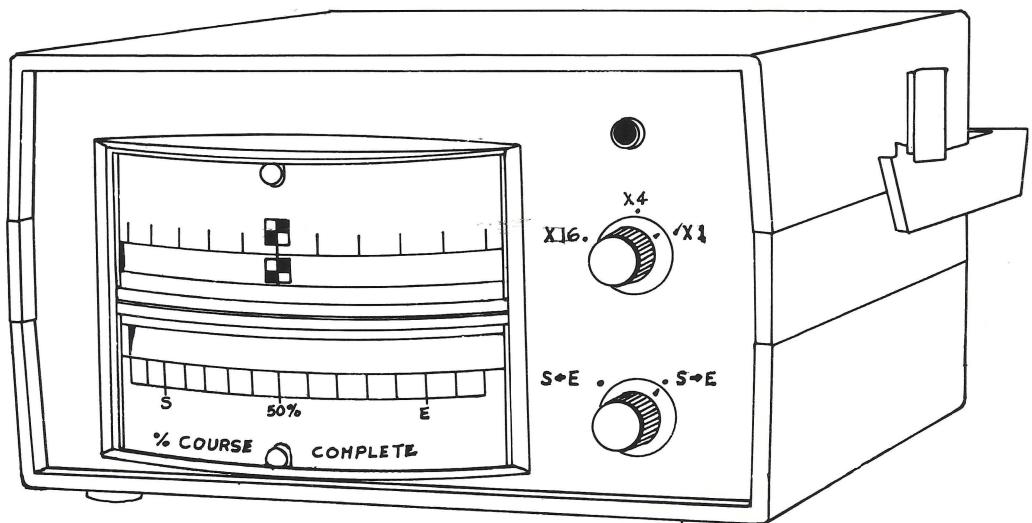


Fig. 2 Left/Right Track Indicator

position and depth once every two seconds. This rate may be changed up to a maximum of one record every 99 seconds if so desired. The Print Ratio is initially set at 1 so the terminal will list every record that is output to the recorder and can be changed to a maximum of 99. For example, if the print ratio was set to 4, the terminal would record every fourth record output to the recorder.

7. The scale to be used on the plotter. This would normally be the same scale at which the final survey data is to be portrayed. The information listed here is fed to the system via a series of input modes initiated automatically by system turn-on. Naturally, all position and elevation data must be in the same units as the ranges from the Mini-Ranger, normally metres, which makes plotting compatible with the UTM grid. The grid co-ordinate system must also be rectilinear (90° intersections between the axes and X axis co-ordinates increase from left to right and Y axis co-ordinates increase from bottom to top), and planar, although curvature corrections can be supplied as a system option.

Running the System

To help explain the use of this system the actual set up used on a side scan sonar survey in Whale Channel (approaches to Kitimat, B.C.) is shown. Figure 3 shows the area and the survey stations used, along with lines that were run. Transponders were placed at stations HOME, WR 524 and on Cumming Point Light. Two basic lines (marked L1 and L2) were easily defined by start and finish points on even grid intersections, Line 1 along Easting 492 000 (X co-ordinate) from Northing 5 901 000 to 5 907 000 (Y co-ordinates) and Line 2, 492 000 and 5 904 000 to 486 000 and 5 910 000. To avoid bad fixes along the baseline various combinations of the transponders were selected. Offsets A, B, C, D and E were run on HOME and the light. Line 1 and offsets F and G on the light and WR 524. The south-easterly portion of offsets H, I, J and K were run on HOME and the light, and the north-westerly portion on WR 524 and the light. Line 2 and offsets L and M were run on WR 524 and the light. To switch from one pair of transponders to the next or to change direction of lines is very easily done with this system. At the start of a day all line and site data is recorded in the MRP memory (up to 16 sites and 10 lines can be stored) so that at the end of any line, the "Escape" button is pushed on the terminal, the system enters the Pause Mode, and a new line or sites are selected in a matter of seconds. Details on these procedures are well documented in the Operation and Installation Manual supplied with the system and, after a couple of days use, the average hydrographer will rarely need to refer to the manual to manipulate the system to its fullest.

System Efficiency

All hydrographers can easily recognise that being able to run straight lines rather than arcs is probably the greatest advantage of this system.

There is no need to consider transponder placement so that lines cross contours, and arcs that intersect the shore line at acute angles (which increase turn around time) can be avoided. As long as the transponders give good coverage of an area the lines may be run in any suitable direction, as was the case in the "old" days of parallel lines fixed by sextant angles. In one area of Caamano Sound it was determined that 17 straight lines gave the same coverage as 23 arcs, cutting down turn around time by about 20 percent. Office time is also greatly reduced, even if fixes are plotted manually, as plotting of simple X - Y values is certainly easier than range - range intersections. The handiest feature in this regard is that output may be selected as chainage and offset, which gives distance from the defined origin of the line and distance off the lines, (usually not plottable with a good Coxswain!).

System Accuracy

The absolute accuracy of the system is dependent on the two ranges received from the transponders and the computed position of the ship will not be geographically correct if the ranges are in error. This error is normally minimised by regular system calibration and is accounted for by determining the "diamond of error" and plotting accuracy lobes for each transponder baseline.

The relative accuracy is excellent for the job of sweeping, where precise line spacing is called for within a given swept area. On the sweep of Caamano Sound most of the lines we ran were set at 500 metres apart, and a few simple calculations show how this spacing is maintained, even though some error may exist in each range.

In Caamano Sound transponders were positioned at station BRIT, N. 5 865 706, E. 458 859 and DUPO, N. 5 865 352, E 470 573, baseline length of 11719.35 metres, and two lines were run due east and west along northings 5 862 000 and 5 862 500 respectively.

Supposing the worst fix accepted was with an angle of 20° between the stations, as shown in Figure 4, the ranges would have been 6933 from BRIT and 17 890 from DUPO, which gives a position of 5 862 000 and 453 000. Now assume the worst case and say that one reading was short by 10 metres and one long by 10 metres, 6 923 from BRIT and 17 900 gives a position of 5 862 050 and 452 980 (50 metres north and 20 metres west of the plotted position). On the next line due north of this point, readings of 6 679 and 17 803 give a position of 5 862 500 and 453 000, but adding and subtracting 10 metres results in 6 669 and 17 813, giving a position of 5 862 556 and 452 981, again 56 metres north and 19 metres west of the plotted position. Thus, the spacing between lines at this point was 506 metres - good relative accuracy, but the absolute accuracy of position has deteriorated drastically.

A similar calculation taken along the same two lines, but in the centre of the pattern where range intersections are 90° shows that line spacing would have been 501 metres, with the same errors applied: -

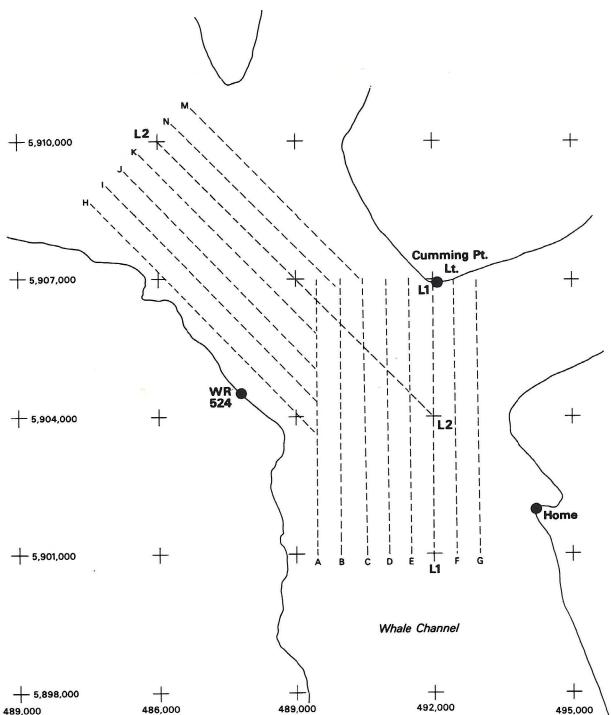


Fig. 3 Configuration of Sounding Lines

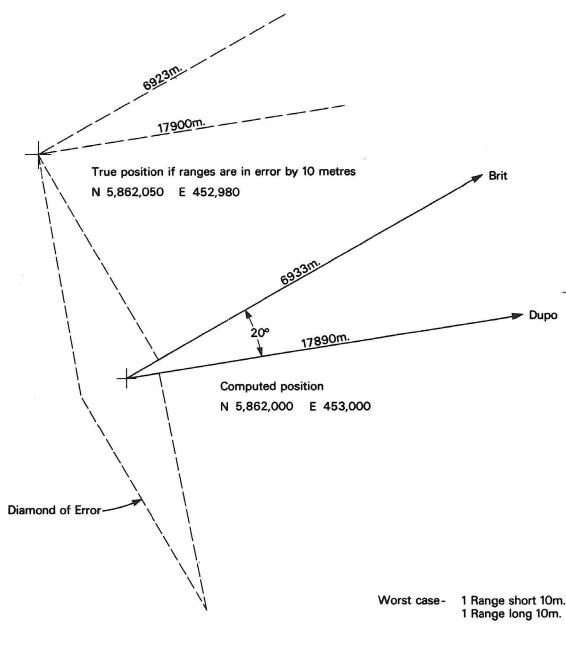


Fig. 4 Effect of Range Error on Position

RANGES POSITION

BRIT DUPO

3 878	11 092	give	N 5 862 000	E 460 000
3 868	11 102	give	N 5 862 006	E 459 987
3 402	10 951	give	N 5 862 500	E 460 000
3 392	10 961	give	N 5 862 507	E 459 988.

Here, because the diamond of error has been reduced by a solid geometric fix, the absolute accuracy is much improved. This good relative accuracy and the excellent manner in which the ship is kept on line with the steering indicator provides the desired overlap of sweep beam patterns generated by side scan sonar towfish.

Conclusions

The MRDP and MINI RANGER SYSTEM is well worth considering on any job requiring straight, accurate lines to be run. Although it was used in its simplest form, that is plotting fixes manually and recording soundings manually, it was still a great time saver. The positions on all our print-outs averaged about ± 2 metres of being on the line, and the crew were very impressed by the quality of the steering indicator. The terminal input and output is very good. Simple commands are used and one does not have to be a computer expert to run the system.

References

O'Connor, A.D., 1977. Operating side scan sonar in depths to 450 metres. Canadian Hydrographic Service, Technical Report, Victoria, B.C., March, 1977.

Woods, M.V., 1977. Caamaño Sound and approaches to Kitimat, side scan sonar sweep. C.S.S. Richardson, Final Field Report, Sidney, B.C., October, 1977.

Motorola, 1977. Mini-Ranger data processor automated positioning systems. Operation and installation manual. Motorola U.S.A. document number 68-P02525F, March, 1977.

Acknowledgements

I wish to thank Meiric Preece, hydrographer; Captain M. Wheeler and the crew of C.S.S. Richardson, who assisted so well on the Kitimat project; Garth Weedon, Motorola Canada; and, Larry Fox and Ron Matthews, Motorola Arizona, who supplied and maintained the MRDP equipment.

Cushy Shore Jobs

Editor's Note: The following article is reprinted by permission from THE NAUTICAL MAGAZINE, April, 1978. The philosophy expressed is familiar to field hydrographers, I'm sure.

In the middle of a West Indian hurricane, China Sea typhoon, Indian Ocean cyclone or just plain ordinary North Sea winter 'blow', every seafarer has thought longingly, since time immemorial, of a nice quiet, comfortable job ashore. Out in the morning, home in the evening and a soft and steady bed every night. It is the same after three days of steaming in fog with the siren going. And the same when nosing out of a port with one's wife and loved ones left behind for months. Always the shore job is visualised as a cushy number -- from mid-ocean viewpoints it is never, but never, anything else. After having been ashore a year or two myself I know very differently, though -- despite my seagoing friends 'rudely'-expressed opinions.

I was thinking only today about a certain Imperial Oil engineer officer. He had a chief's ticket, was serving on board in a junior position and thought he could accomplish more ashore. So he applied for and got the job of supervisor of maintenance and repair in the Imperial Oil Fleet. Name of Art McKenzie if you happen to know him?


In two years ashore he has circled the world twice and has spent 300 nights in various hotel bedrooms. Overall he has been away some three months more than if he had been in a seagoing ship. 'There have been times,' he says, 'when I've come into the office in the morning, been told of a situation that requires my presence, phoned home and asked my wife to pack a bag and been on my way within minutes. On one occasion the ship was on her way to the Persian Gulf from California. I flew to Singapore and a helicopter transferred me to *IMPERIAL OTTAWA* at sea.' Art is a happy man in spite (or because) of it all.

Although that particular story was about one man and one shipping company, it is equally applicable to thousands of others in all kinds of industry. To make good money, feel worthwhile inside one's self and to forge a meaningful career, one has to be prepared to work all the hours that God sends and to travel anywhere at the drop of a hat. That's a real old-fashioned, corny philosophy. A ghastly, boring, repellent (to some) philosophy. But it is the only true one.

A 'comfortable', lowly-paid (and there are no others for unqualified young people) 9-to-5 job rots the soul, frustrates the spirit and leads through an unhappy life of non-achievement to an equally unhappy old age with no single memory of a great event tackled and overcome. Just an unfulfilled lifestyle as useful, interesting and memorable as that of a cabbage.

RECORDING CURRENT METERS

RCM4 RCM5

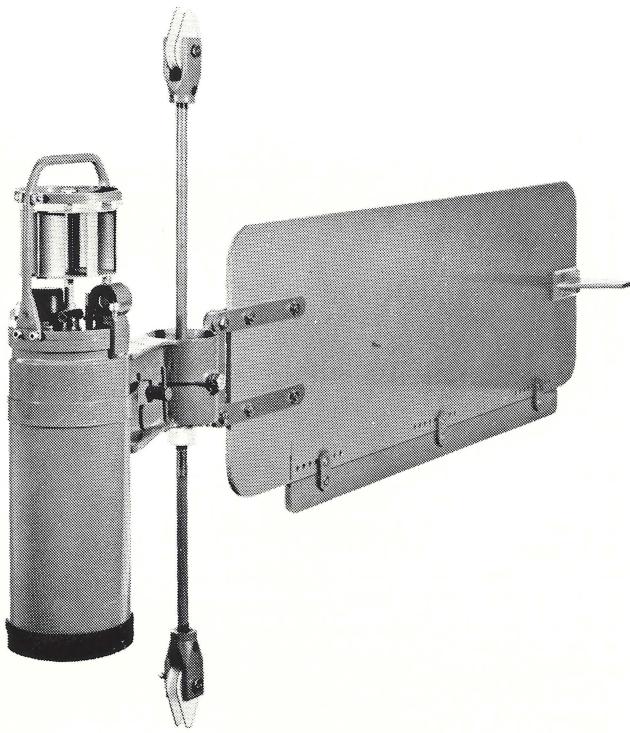

THESE INSTRUMENTS ARE FULLY SELF-CONTAINED AND DESIGNED TO RECORD SPEED, DIRECTION AND TEMPERATURE OF THE OCEAN CURRENTS BELOW THE WAVE ZONE.

SENSORS FOR PRESSURE AND CONDUCTIVITY ARE ALSO AVAILABLE.

THE RCM4 IS CAPABLE OF 2000 METERS DEPTH.

THE HIGH PRESSURE VERSION (RCM5) WILL OPERATE TO A MAXIMUM DEPTH OF 6000 METERS.

AANDERAA INSTRUMENTS LTD.

560 Alpha Street, Victoria, B.C. V8Z 1B2

Telephone (604) 386-7783

U.S.A. Sales & Service
30F Commerce Way, Woburn 01801, Mass.
Telephone (617) 933-8120

Municipal Place Names and Hydrographers

David Monahan

Geoscience Mapping & GEBCO
Canadian Hydrographic Service
Ottawa

During the opening ceremonies of the CHA Conference at Patricia Bay last year, the Mayor of Sidney, B.C. presented a plaque to Mike Bolton and his staff welcoming them to their new home in Sidney. His Worship mentioned that Sidney was named after a hydrographer and that Sidney is the only town in Canada whose coat of arms honours a hydrographer, in that it contains a picture of a surveying vessel. His comments got me to thinking about how many municipalities in Canada were named after hydrographers.

A great number of Canada's place names come from the early hydrographers, most of whom were the first explorers to enter a region. Usually they named islands or water masses; municipalities were built so much later, after the hydrographers had done their work and departed, that it would have been impossible for the hydrographers to actually name the communities. The names hydrographers did assign could be categorized into several groups, the first being ship names. Most names around Canada like "Endeavour", "Intrepid", or other names implying manliness in the face of adversity come from early hydrographic ships. Fortunately the early hydrographers did not name features after their launches; can you imagine for instance the "Bright, Brave, Bold, Brisk Bay"? Sometimes, place names reflect the state of mind of the hydrographers on arriving there; surely the most evocative of these is the "Bay of God's Mercy". Another category of names used by hydrographers was what one might call the names of patrons; kings, lords of the admiralty, sponsors or important dignitaries. Ships' captains, as opposed to hydrographers on the ships, seemed to have received a fair share but hydrographers themselves have received fewer names and the number of municipalities named after hydrographers is probably quite small.

All this leads to the point of this short note. Now, how many Canadian municipal place names with a hydrographic origin can you come up with? To get you started, British Columbia has Sidney and Vancouver, Ontario has Bayfield Inlet, La Belle Province has Cartierville and Newfoundland has Cook's Harbour. If you can think of any other municipal place names draw up a list and mail it to the Editor of Lighthouse. A prize of \$25.00 will be awarded to the person compiling the longest list. The contest is open to all members of the Canadian Hydrographers' Association and all subscribers to Lighthouse. Judging for authenticity will be carried out by an independent panel of experts. All entries must be received at the office of the Editor no later than September 30th, 1979.

CALIBRATION FACILITIES AVAILABLE AT AANDERAA INSTRUMENTS

These facilities have been assembled primarily for the calibration of oceanographic instrumentation, but if your work involves the precise measurements of pressure or temperature then we may be able to help you with your calibration requirements.

The rate for use of these facilities along with our technical staff is \$ 25.00 per hour.

Please feel free to contact us and discuss any requirements you may have.

PRESSURE CALIBRATION EQUIPMENT

RUSKA GAS-LUBRICATED PISTON PRESSURE GAUGE
Range: 0-600 PSI

Accuracy: Gauge pressure - 0.015% of reading or 0.0015 PSI whichever is greater

Absolute pressure:
same as above plus the error in the reference pressure

TEMPERATURE CALIBRATION EQUIPMENT

HEWLETT PACKARD QUARTZ THERMOMETER
Range: -80 to 250°C
Accuracy: 0.01°C overall

CONSTANT TEMPERATURE BATH
Range: -5 to 35°C
Volume: 8 cubic feet

CONDUCTIVITY CELL CALIBRATION

Using the constant temperature bath and quartz thermometer described above conductivity cell calibrations can be performed by comparison with a standard cell. The resolution of the standard cell is .017 MMHO/cm

CURRENT DIRECTION

Using a turntable aligned with the earth's magnetic field, the $\pm 5^\circ$ accuracy and alignment of the R.C.M. compass can be checked

CURRENT SPEED

Proper operation of the R.C.M. rotor, rotor counter and clock can be tested using a fluke 195A frequency tester

AANDERAA INSTRUMENTS LTD.

560 Alpha Street, Victoria, B.C. V8Z 1B2
Telephone (604) 386-7783

Book Review

Round the Horn or Through Magellan An Extreme Case of Voyage Planning

The Netherlands Maritime Institute

When a ship's Master gets his sailing orders, he sets in motion a chain of events which is affected to a great extent by the work of hydrographers. So it was with the ill-fated voyage of the *V.L.C.C. METULA* which ran aground in the Straits of Magellan on 9 August, 1974.

As a result of the inquiry into the *METULA* grounding, the Netherlands Maritime Institute was commissioned by the Directorate of Shipping to prepare a report discussing the planning of a voyage by a V.L.C.C. through relatively unknown waters.

In this report the authors have tried to document what is involved in such planning on the part of the ship's fleet management and the Master although they have emphasized planning required by the former.

Of clear interest to Hydrographers are the conclusions reached by the authors concerning the

number of publications which must be consulted to obtain information required for effective voyage planning. This points up the importance of Hydrographers collecting and documenting information for inclusion in Sailing Directions.

Another recommendation is made to present information such as port of entry procedures, routing schemes, search and rescue information, distance tables and frequencies and broadcast times of radio stations, in chart format. This is presently being done by J. D. Potter Ltd., U.K. for the North Sea area.

The value of this publication to the Hydrographer lies in its documentation of what the authors believe is the information required by the Mariner to safely conduct his voyages. The special needs of the Master of a 300 m V.L.C.C. drawing in excess of 18 m have to be met as well as those of a 50 m coaster.

Available from: - Public Relations Dept.
Netherlands Maritime Institute
19, Hofplein, P.O. Box 1555
3000 BN, Rotterdam
The Netherlands

Cost: Dfl 60 U.S. \$20.00 U.K. 15

R. A. Marshall
Canadian Hydrographic
Service
Central Region
Burlington, Ontario



Shallow Water Search MAGNETOMETER

The new Model G-806M is a complete magnetometer system for all search and geophysical survey applications in rivers, bays and shallow coastal zones. Its low cost, rugged dependability and ease of use make this the ideal instrument for all shallow water search and survey problems.

For full information and a copy of our application report, Marine Magnetics Search, contact:

- Ideal for location of pipelines, shipwrecks, well casing, anchors, iron debris.
- Small, lightweight, easily transported, installed and operated on small boats.
- High sensitivity, dual channel analog recorder display and digital output for magnetic tape recorders.

Exploranium
Division of GeoMetrics

436 Limestone Crescent,
Downsview, Ontario, Canada M3J 2S4
Telephone: (416) 661-1966, Telex: 06-22694.

Notes

Standards of Competence for Hydrographic Surveyors

Hydrographic Surveyors may have heard, during the last seven years, of the work of the Federation International de Géomètres (FIG) or of the International Hydrographic Organization (IHO) in developing international standards of competence for hydrographic surveyors. This work has been reported on previously by McCulloch in this journal and Ingham at the 16th Annual Canadian Hydrographic Conference at Burlington.

The work reached a level of fruition in August, 1978 with the publication of the 1st Edition of Standards of Competence for Hydrographic Surveyors. This work was finalized by the International Advisory Board on the Education of Hydrographic Surveyors under the chairmanship of Rear Admiral D.C. Kapoor. Other members of the Board are J. Bourgoin (France), W.J.C. Burki (Netherlands), A.E. Ingham (U.K.), A. J. Kerr (Canada) and T. Uchino (Japan).

The Standards of Competence are intended to provide a guide to hydrographic organizations and educational institutions in the preparation of their own standards. It is hoped that this will have particular application in the developing countries where there is, in many cases, an urgent need to develop a competence in hydrographic surveying.

Further information may be obtained from the Office of the Dominion Hydrographer, 615 Booth St., Ottawa or from A. J. Kerr, 8th Floor, 240 Sparks St., Ottawa.

Symposium 1980-Position Fixing at Sea

Call for Papers

The Hydrographic Society and the Canadian Hydrographers' Association invite authors to submit papers for the 3rd Symposium which will be held at the University of Southampton, England on April 15th, 16th, 17th, 1980, inclusive.

Earlier symposia organised by the Hydrographic Society have attracted delegates from many countries, from Government as well as commercial companies.

Papers are invited from: users, manufacturers, research establishments, Government departments and individuals.

The papers will be presented in English, and since delegates will receive their papers in advance, authors will be invited to give highlights of their papers to attract as much discussion as possible from the audience.

If you wish to submit a paper please reply as soon as possible to: R. Britton, Functions Organiser, Hydrographic Society, Department of Land Surveying, North East London Polytechnic, Forest Road, London E17 4JB.

Hydrographic Society Appointment

The Hydrographic Society announces the appointment of Mr. George Edney as Executive Secretary.

A former General Manager of the Port of Bristol Authority and previously with the Port of London Authority, Mr. Edney was a part-time member of the Milford Haven Conservancy Board for a number of years. He was also formerly Chairman on the Executive Committee of the Dock and Harbour Authorities Association, as well as being a Director of the International Ports and Harbours Association.

Mr. Edney's appointment coincides with the increasing national and international activities of The Hydrographic Society, whose administrative headquarters are based in London. He will be responsible for developing the Society's planned growth, as well as co-ordinating its principal executive functions.

Mr. Edney assumes his appointment on 1 January 1979.

New Staff Appointment at the Bureau

In response to Circular Letter 16/1978 there were 14 applications for the post of Professional Assistant (Editorial) at the IHB which became vacant on 23 June 1978. The duties of this post were extended to include technical projects arising from decisions of the Organization. By specifying 10 years' hydrographic experience as one of the qualifications, the Directing Committee hoped to strengthen the technical capability within the Bureau.

A number of the candidates were highly qualified and, after a very careful study of their records of service and qualifications, the Directing Committee is pleased to announce the selection of Commander N.N. SATHAYE.

Commander SATHAYE, who is 48 years of age, has had long experience in hydrography since he joined the Hooghly River Survey in 1950. In addition to passing various departmental examinations, he obtained a Certificate of Merit from the Coast and Geodetic Survey after a period of training in the U.S.A. during 1958.

SATHAYE was sent to Singapore in 1970 as an Expert in Hydrography under the Colombo Plan. Except for a short break in 1973 when the Colombo Plan contract terminated, he has remained as Singapore's first Hydrographer to the present date. He takes up his duties at the Bureau on 12 February 1979.

During the period of vacancy of this post, the editorial duties have been carried out most competently by Mme M.-R. BRESSET, of the Bureau's staff.

Geometrics '79

A series of four seminars organized and directed by Humber College of Applied Arts and Technology in cooperation with the:

Canadian Institute of Surveyors
Canadian Hydrographic Service
Canadian Hydrographers' Association
and the Ontario Land Surveyors

- I. HYDROGRAPHY
May 7 - 11, 1979
Toronto (Canada)
- II. SONAR WORKSHOP
May 7 - 10, 1979
Toronto (Canada)
- III. LAW OF THE SEA
May 14, 1979
Ottawa (Canada)
- IV. CONTROL SURVEYS (MANOR PROGRAM)
May 28 - June 1
Toronto (Canada)

For further information, contact:

Conference & Seminar Services
Humber College of Applied Arts & Technology
P.O. Box 1900
Rexdale, Ontario M9W 5L7

(416) 675-3111

ACOUSTIC UNDERWATER TELEPHONES

UQC and 27 KHZ Single Sideband

UNITS DESIGNED
SPECIFICALLY FOR:

- Submersibles
(Model 703A)
- Diving Bells
(Model 715B)
- One Atmosphere Diving Suits
(Model 705)
- Wellhead Service Capsules
(Model 703A-P)

MESOTECH SYSTEMS LTD.

1174 WELCH STREET
NORTH VANCOUVER, B.C.
CANADA V7P 1B2 (604) 980-3474

OCEANOGRAPHIC AND GEOPHYSICAL Data Logging Systems

IN-SITU TIDE GAUGE

Model TG-12



\$5875

- Accuracy of 0.01% of selected depth range.
- In shore or continental shelf mooring.
- Wave averaging.
- Temperature and Elapsed Time Records.
- Digital Recording.
- No encapsulated Circuitry or mechanical recorders.
- Battery Powered - 8 Alkaline D cells.
- The TG-12A is a precise low cost in-situ tide gauge. Pressure, temperature, elapsed time and reference number are recorded digitally on 1/4" magnetic tape at preselected intervals. Magnetic tape records are Plessey/Aanderaa compatible and can be translated on our battery operated, microprocessor tape reader model 769.

TIDE AND WAVE HEIGHT RECORDER

Model 750A




\$6375

- Wave Climatology Studies (Burst Sampling).
- In-Situ Tide Gauge.
- Sea Slope Measurements.
- Large Capacity Digital 1/4 inch Magnetic Tape, Storage (5 inch reels).
- Elapsed Time Records.
- Expandable to include Temperature, Conductivity, and an Acoustic Link.
- In-Situ Depths to 2000M.
- A unique Time Interval and Frequency Translation Signal Processor¹ provides rapid high resolution samples for wave data and long period time averaged data for mean tide records. A high resolution quartz crystal pressure transducer accurate to 0.01% of full scale serves as the sensing element.

¹Patent Pending.

CONDUCTIVITY, TEMPERATURE & DEPTH PROFILER

Model CTD-12




\$6500

- Accuracy of ± 0.03 PPT equivalent salinity over range of 27 to 41 PPT. Temperature $\pm 0.01^\circ\text{C}$ from -2° to 30°C.
- 12 bit A/D data samples.
- In-situ digital recording on 1/4 inch magnetic tape; entirely battery operated.
- Rugged 6 electrode cell construction.
- Conductivity, temperature and depth are sensed, measured, digitized and recorded rapidly on 1/4" magnetic tape. Real time surface monitoring of salinity profiles is via a two conductor wire for printout on our Digiprint 701 Data Verifier. All magnetic tapes translated on Tape Reader Model 769.

CALL OR WRITE FOR MORE INFORMATION
Applied Microsystems, Ltd.

769 Lily Ave., Victoria, B.C. Canada V8X 3R7
(604) 479-8034



OVERSEAS SALES:

Norway

A/S Tekno Team, Box 313
5051 Nesttun, Bergen
Ph. 05 22 02 62

Letters to the Editor

Sir, --- Internav have a full-page ad for their Loran-C Coordinate Converter in last November's Lighthouse which rather gives the impression that the Coordinate Converter does away with the need for a chart.

These coordinate converters, including the Nav. Boxes we use in hydrography, are extremely useful in steering cross-pattern lines, and a great convenience in calculating positions instead of plotting continuously. However, they do conceal some traps that the operator must be aware of.

First, they do not show up bad fix geometry. Taking an example from the extended Pacific Coast Loran-C chain, which will shortly have a Z secondary at Port Hardy, Vancouver I.: a mariner bound from Vancouver to Prince Rupert could easily set up his coordinate converter on TD(Y) and TD(Z) at Vancouver, and use it to round the dangerous Triangle I. at the north end of Vancouver I., oblivious of the fact that he had no fix there because he was on the M-Y baseline extension.

Second, coordinate converters generally do not show cycle skips, which can be detected by regular plotting.

Third, they cannot account for changes in navaid errors, such as the overland error (ASF) of Loran-C. I have just worked out a cautionary case of a fisherman using the future Loran-C chain on the Atlantic Coast, which will have Caribou as Master and Nantucket and C. Race as secondaries. He adjusts his coordinate converter to give the correct Lat., Long. at Country Harbour, near Canso, N.S., and sets off for Sydney, 100 miles up the coast. It happens that along this track the overland path from Nantucket increases from being all over-water, to travelling the full length of Nova Scotia, while at the same time the proportion of land on the path from the Master decreases. The net effect is to increase the ASF by 2 1/2 μ s by the time the fisherman approaches Flint I. on the way in to Sydney. The lattice on the charts will be warped to allow for this ASF change (using the results of our recent calibration), but the coordinate converter doesn't know about it. Since the effect of the 2 1/2 μ s error is to move the position line 1000 m to seaward, the coordinate converter will calculate a position 5 cables further offshore than the true position, and if he is cutting it fine and isn't watching his radar the fisherman could easily run aground on Flint I.

I welcome Internav's advertising in Lighthouse. I know that their Coordinate Converter is a very useful piece of equipment, and I expect that their users' manual explains the precautions to be taken. I just want to stress that the user should always be aware of what lies behind those confident-looking figures on the nixies of a Nav. Box.

R. M. Eaton
Canadian Hydrographic Service
Atlantic Region
Dartmouth, N.S.

Sir--- I think we all agree with Mike Eaton that the user of any box should always be aware of what hides behind its display numbers; and this is, of course, the reason our CC-2 Internavigator Operators Manual has 41 pages in it, compared to the single page of our Lighthouse advertisement which, incidentally, we are running again in this issue. But Mike raises several points, and I will deal with each in turn.

First, I would like to state categorically that Internav does not feel that the Internavigator does away with the need for charts. What we do say is that with such a device, the lack of an appropriately scaled, latticed, chart in an operational area need no longer be the limitation it once was.

There's an important difference here and, in fact, no one would be more pleased than I if Canada and U.S. waters, and for that matter the rest of the world, were charted to the N^{th} degree. Unfortunately, the sad truth is that the present lack of latticed charts is severely hampering the use and acceptance of Loran C for fishermen and other commercial users for whom the system is primarily intended.

What the CC-2 permits is operation in an area serviced only by a standard nautical navigation chart showing just latitude and longitude lines. In such an area, a conventional receiver would be thoroughly unusable but at the same time - due to its overall sophistication and cost - the vast majority of our users will not purchase a CC-2.

Therefore, we feel quite strongly that latticed charts are still highly important. Actually, it is my feeling that any announced operational dates for Loran C chains are largely meaningless unless latticed charts are available to users on that date. I hope this underlines the fact that we, at Internav, are not attempting to do away with charts. We are merely providing a means for using the system when latticed charts are not available.

Now let me address first the problem of bad fix geometry. It is stated that an operator sailing from Vancouver to Prince Rupert would be oblivious to the fact that fixes in the vicinity of Triangle Island would be unusable because he was on the MY base line extension. This is theoretically correct. All Loran C receivers, however, have standard deviations on the order of 20 to 100 nanoseconds depending upon various factors. Internav's are no exception. This standard deviation reflects itself immediately as a standard deviation in latitude and longitude. When in good coverage, a standard deviation of latitude, for example, would be on the order of two to ten seconds of arc or 20 to 100 feet, but in the vicinity of base line extensions, the same receiver errors would cause latitude variations measured in miles, not feet. It will appear to the operator that his position fixing capability has dramatically deteriorated.

I do concur with Mike that co-ordinate converters do not show cycle slips - these can only be detected by regular plotting. I would like to add, however, that on many occasions Loran C receivers do not show cycle slips either. It is


the regular plotting which can show up the cycle slips under worse case conditions. But one can plot a latitude/longitude output just as readily as a time difference output. It doesn't matter whether the operator is plotting Loran C time differences, latitude and longitude generated from Loran C time differences, lanes from a Decca receiver, latitude and longitude generated by a satellite navigation system, or lanes provided by an Omega system. It is the decision to plot that counts and it is the deviation of the ship's path on the plot due to an abnormality which provides the warning. I might further add that when cycle slips occur within specified Loran C coverage, they generally result in warning indications on the receivers. In our case, these are also transmitted to the CC-2, and cause a warning light to be illuminated on its front panel.

I do concur with Mike's caution about using the system in new areas, and the CC-2 has the capability for putting in corrections for local anomalies of the type described. Our operators handbook describes the requirements for these corrections and the types of errors that can result. But I feel that Loran C ASF correction is an area where Government and industry can come together.

The co-ordinate converter is a new piece of equipment for the fisherman, which provides many functions he would not otherwise have, such as the ability to punch in a number of waypoints and get steering and distance information. But we need to be able to tell him the value of the corrections for the various local areas, and these will probably be available from the data taken during chain

Guess the Location

This rather imposing looking tide gauge tower was installed in the year 1940 to determine whether differences in tidal levels existed between a sheltered harbour location and an offshore location outside the harbour. Is there anyone out there who knows the location? Clue: north of 50°. Answer on page 23.

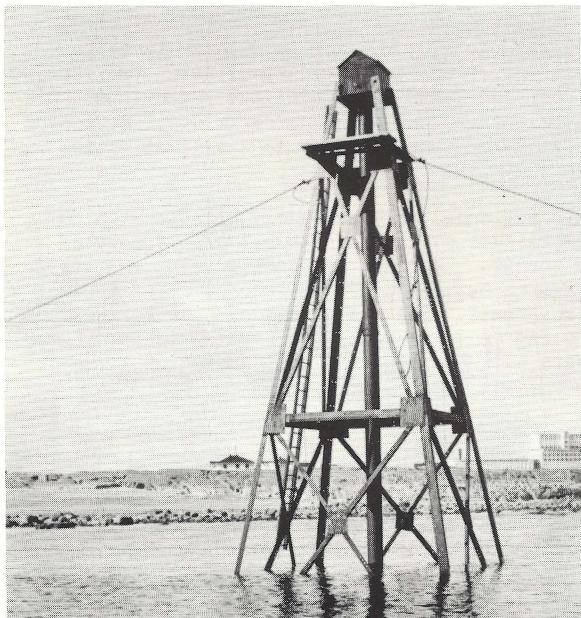

calibrations. I would hope that in the future this information could be provided to fishermen who use co-ordinate converters. One day it should be possible to include the corrections within the memory of the computer.

My feeling is that at Internav, we are definitely breaking new ground with this device. In the past, there have been problems when we moved from one system to another, such as from Loran A to Loran C or from Decca to Loran C. Some day, there will be a difficult transition from Loran C to whatever, perhaps satellite navigation.

However, I am convinced that all future navigation systems will have latitude and longitude as their primary output rather than time difference numbers or lanes and parts of lanes, because of the dramatic price breakthroughs coming with very large scale integration (VLSI).


I can still remember an airborne version of our CC-2 I helped design 14 years ago. Then, it cost \$70,000: today the CC-2 costs \$4,500. Tomorrow, a precision latitude/longitude system will probably be available to even small lobster boats.

If mariners in general switch to the latitude and longitude grid system now the future transition to the next navigation system will be far easier.

John M. Currie
President
Internav
Sydney, N.S.

ACOUSTIC RELEASES

32 OR MORE CODES
5000 LBS. CAPACITY
3000 FT. DEPTH

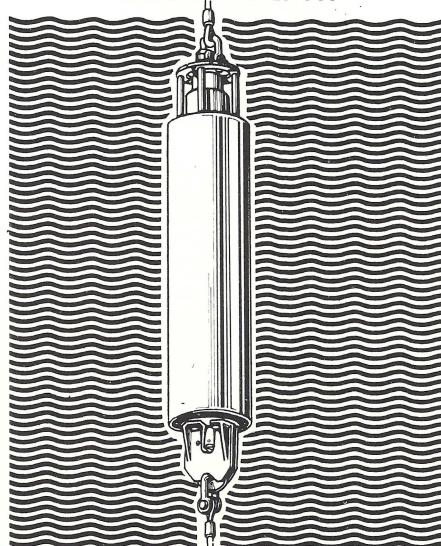

MESOTECH SYSTEMS LTD.

1174 WELCH STREET
NORTH VANCOUVER, B.C.
CANADA V7P 1B2 (604) 980-3474

News from C.H.S.

Departmental Name Change

The Canadian Hydrographic Service has had many departmental homes during its long and distinguished existence, and has just moved to a new one. Sections of the Government Organization Act 1979 were proclaimed April 2, 1979 establishing the Department of Fisheries and Oceans, of which the Canadian Hydrographic Service will form part. The Honourable Romeo LeBlanc has been sworn in as first Minister of the new department and Mr. D. D. Tansley appointed as Deputy Minister.

1979 Training

The classroom portion of Hydrography I this year ran from Jan. 23 to Mar. 29 in Ottawa. Taking the course were: Bill Van Duin (Pacific); Phil Elliott, Jon Biggar and Lorne Perkins (Central); Dave Stewart (DOT, Halifax); Christian Idigo (Nigeria); and Cliff Chaulk (DND, Ottawa).

The field portion of Hydrography I will be held in April, May and June using the Patricia Bay facilities of Pacific Region as a base of operations.

A drafting course held Feb. 19 to Mar. 16 in Ottawa was attended by Al Gris and Hermo Nepomuceno of Central Region to complete Cartography I requirements.

PRANS Evaluation

Intended to assist large vessels in moving safely and efficiently through confined channels the Precise Radar Navigation System (PRANS) is built by Associated Controls and Communications Incorporated, Lynn, Mass. System accuracy is attained by using a highly accurate clock and a unique pulse detection technique. The system can be interfaced to existing radar systems and uses passive reflectors as shore stations.

The Dominion Marine Association is interested in the potential of the system to improve production, capacity and safety of operations on the St. Lawrence Seaway, and have awarded a contract to ACCI for the production of one system to be evaluated on the Seaway this summer.

Also involved in the evaluation will be Transport Canada; the St. Lawrence Seaway Authority; the National Research Council, and the Canadian Hydrographic Service, Central Region. Horizontal control for the on-shore reflectors was established by Central Region, C.H.S. in April, 1979. C.H.S. will also be involved in the accuracy tests in July and August.

Initial testing will involve the Dominion Marine Association vessel "ROSEMARY" and, later in the summer, a lake carrier.

TATS Units Installed in Permanent Gauging Stations

The Tidal Acquisition and Telemetry System (TATS) is a microprocessor-controlled data logger designed by the Tidal Instrument Development Section of C.H.S. in Burlington specifically for permanent gauging in both tidal and non-tidal waters, and is manufactured by Canadian Applied Technology in Buttonville, Ontario.

Five TATS units have been installed in Central Region gauging stations for approximately 6 months on test and, except for some minor software and hardware problems, have performed well. These units have now replaced existing instrumentation which stored data on punched paper tape and transmitted the stored data on command via Telex terminals. Whereas the existing units could transmit the data only once and only to a central location, the TATS units will transmit data over telephone lines to any user having a data terminal, an acoustic coupler and the proper access commands.

Central Region, C.H.S. will have an additional ten units installed this summer at stations on the Great Lakes and St. Lawrence River. Atlantic Region and Pacific Region will each have 3 units installed soon, and Pacific Region is also using TATS in a tsunami warning application.

Semi-Automatic Scaler Large Success

The prototype of the Semi-automatic Chart Scaler developed in the Atlantic Region underwent tests during the past survey season. The results were excellent. It was found that one man operating the scaler was able to do as much work as two men scaling by hand. Additional time was saved because tidal reductions were applied directly.

The scaler has a cursor which is manually set on the graphed sea-bottom. By pressing the 'Fix' foot pedal the depth is recorded as a sounding at the fix. By pressing the 'READ' foot pedal a sounding is indicated between fixes. A keyboard is used to indicate missed soundings, buoy fixes and circle fixes. The keyboard also has facilities for setting the transmission mark and editing. The scale is presently set up for the EDO 9040 sounder, incorporating all of its phase changes and meter/decimeter modes.

The semi-automatic scaler is interfaced with an HP 9815A calculator. The calculator supplies software for scaling, editing, listing, correcting for bar check and applying tidal reductions. All depths are stored on a tape cartridge. Accessing the files produces a paper tape listing of the data.

Field personnel were extremely pleased with the capabilities of the machine but also suggested a few changes. The hydrographic development staff have been busy this winter incorporating these improvements. One scaler has had all corrections made and it is presently undergoing tests. Three others will be ready for the '79 season.

Thinking Pays

The Federal Government Suggestion Award Program recently paid off handsomely for Mike Woods of Pacific Region. Last field season he solved the age-old problem of efficiently plotting range-bearing soundings during collection so that no time has to be spent plotting after the day's work. The idea is simple enough - a protractor with a single, moveable arm, with holes spaced every 5 mm along the moveable arm and the main body of the protractor cut away to allow plotting within the circumference of the protractor.

In the field, the operator tapes the protractor, centred over the main station and zeroed through a reference station, to a boat. As each angle is taken the arm is set on the angle and the pencil placed through the appropriate range hole marking the boat board. This will make range bearing sounding as simple as sextant sounding where at the end of the day all fixes are plotted and reading off the roll can commence immediately. A good hydrographer could even read off the number of soundings between fixes during the day. Pacific Region is having some of these plotters manufactured and hopes to distribute some to other Regions to try out.

News from Industry

M. S. E. Opens Maritime Office

M.S.E. Engineering Systems Ltd. have announced the opening of a Maritime Regional Office effective December 23, 1978. The address of the new office is:

M.S.E. Engineering Systems Ltd.
59 Riverside Drive
Lower Sackville, Nova Scotia
B4C 1C2
Telephone: (902) 865-9310

M.S.E. also have announced the appointment of Mr. Ted Corbett as Manager, Maritime Region. Mr. Corbett brings with him a background in managing instrumentation and operations at the Atlantic Geoscience Centre, high power transmission and ionospheric with the U.S. Defence Communications Agency, and military electronics with the Canadian Armed Forces.

Klein Side Scan Successful at over 6,000 Foot Depths

For over two years the U.S. Navy's Submarine Development Group I, San Diego, California, has been successfully operating KLEIN SIDE SCAN SONARS on various missions to over 6,000-foot depths.

On separate operations, Klein's Side Scan Sonar Towfish were towed up to:

6,800 feet to locate various targets including an aircraft and other debris,

5,000 feet to locate an old sunken submarine.

5,000 feet to locate special targets (actually found at 1,800 feet).

Some of the located targets were 1 to 2 feet in span.

Various weights from 500 to 1,000 pounds were used to help depress the tow cable. Cable lengths ranging from 8,000 feet to 15,000 feet were used on separate missions.

Klein's standard Side Scan Sonar Towfish are rated to 7,500-foot depths and are often used in deep operations as noted above. Special towfish rated to 20,000 feet have recently been tested and are available on special order.

Canadian Hydrographic Conference Proceedings

Copies of the Proceedings of 1977 and 1978 Annual Canadian Hydrographic Conference are still available. The 1977 proceedings may be obtained by writing to:

The Editor
LIGHTHOUSE
c/o Canadian Hydrographers' Association
P.O. Box 5050
867 Lakeshore Rd.
Burlington, Ontario L7R 4A6

The 1978 proceedings are available from:

R. W. Sandilands
Chairman, Publications Committee
17th Annual Canadian Hydrographic
Conference
Institute of Ocean Sciences
Patricia Bay
P.O. Box 6000
9860 West Saanich Road
Sidney, British Columbia V8L 4B2

The price is \$10.00 Canadian, postage paid. (\$6.00 to members of the Canadian Hydrographers' Association.) Payment by cheque or money order should be made to the Canadian Hydrographers' Association.

CHA Personal Notes

Atlantic Branch

Joining the cartography unit this year were *Alex Hantzis*, transferred from Ottawa, *Jim Ross* and *Charles Legasse* (who recently completed Cartography I); *Charles O'Reilly* is a new addition to the Tidal Section; *Gunther Schutzenmeier* was seconded to Ottawa for training on Step I; *Mike Eaton* and the navigation staff co-ordinated a 3 day introductory Loran-C/SATNAV course for 80 people from B.I.O., local fisheries, DND and MOT; *Steve Forbes* has won a position as CS-2 with Hydrographic Development.

Ottawa Branch

John Cooper, who retired from his position as Maritime Boundaries Officer last December, is being employed on contract to provide continuity until his successor is named; *John O'Shea* returned to the Planning Unit on Jan. 1 after a one year assignment as Acting Regional Hydrographer in Quebec Region; *E. Belec* left C.H.S. at the end of March for a position with Geodetic Survey of Canada; *Don Vachon* joins C.H.S. in May filling the vacant engineering position; *Elizabeth Levey* joined C.H.S. in Feb. replacing *Danielle D'Aoust* who was promoted to 240 Sparks St.

Central Branch

Reg Lewis has returned to Burlington after a one year assignment in Ottawa and will head the St. Lawrence survey in the Gananoque area this summer; *Pete Richards* left Burlington early this year to take up the position of Chief Training Officer in Ottawa; *Don Knudsen* has also left C.H.S., heading for greener pastures with the Canada Centre for Remote Sensing in Ottawa; the deep sounding Central Region string band of *Ray Chapeskie*, *George Macdonald*, *Rob Tripe* and *Brian Tait* may be heard at the IHTC and CIS conferences this May - give those boys a big hand.

Pacific Branch

Kal Czotter, *Dale Wood* and *Rainer Shoenrank* successfully completed the Hydrography II course last fall; *Reg Pierce* and *Peter Morton* returned from Ottawa after passing their Cartography I course; *Bill van Duin* is currently on Hydrography I course; *Stan Huggett* and *Bill Crawford* (Tides and Currents) returned recently from the PARIZEAU oceanographic FGGE cruise on the equator with fine tans having missed what passes for winter in Victoria; new staff in the Region are *Dave Harrison*, Supervisor of Chart Corrections and *Susan Huggett*, Technical Records; Pacific Region assignments for the 1979 field season will see *Barry Lusk* in charge of a survey party working in Laredo Sound and Harrison Lake; *Graeme Richardson* going to Seymour and Belize Inlets and Pitt Lake; *Jim Vosburg* will be back in the Queen Charlotte Islands at Masset Inlet onboard C.S.S. RICHARDSON and *Vern*

Crowley on the Mackenzie River with the charter vessel RADIUM EXPRESS; *Tony Mortimer* will be continuing Loran-C calibrations and latticing; *Tony O'Connor* will be on the course faculty for the Humber College Sonar Workshop in Toronto in May.

The Great Football Caper

Every November, rain, snow, frost, or sun, Pacific Region hosts the Challenge Bowl, the "touch" football game between traditional rivals, the Electronics Technicians and the Hydrographers. In 1978 superior training and organization on the part of the Technicians paid off in a defensive battle which saw them triumph 2-0. Some say they cheated - bringing in ringers etc., but it was their uniforms that did it. The photo shows offensive captain of the Hydrographers *Tony "sore-foot" O'Connor* presenting the Challenge Bowl to *Bill "the lout" Hinds* defensive captain of the Technicians, at a luncheon held in December.



Pacific Branch Luncheons

Sandy Sandilands was guest speaker at a C.H.A. sponsored luncheon in December. An excellent turn out of about 40 were treated to a fascinating dissertation on hydrographers past. The theme of Sandy's talk gave us all a brief look at some of the research he has been doing on the History of Hydrography in Canada.

Former Hydrographer and now instructor at the B.C. Institute of Technology, *Don Jarvos*, was the honoured guest at a C.H.A. Luncheon held in February. Don's topic, "Survey Education - Backsights and Foresights", was very well received and very enlightening. The survey community of the western provinces has seen the need to set up a survey engineering degree program and Don's talk presented a good insight into how the education system will likely set up such a program and the effect it will have on producing the right balance of engineering and technologists required by industry in future.

R. C. Melanson Retires

R. C. (Russ) Melanson, Regional Hydrographer, Atlantic Region, retired on December 28th of last year after a long and colourful career with the Canadian Hydrographic Service.

Russ joined CHS in April, 1948 taking part in surveys of the Atlantic Provinces, Sub-Arctic, High Arctic and the west coast for 16 consecutive seasons. Many of the establishments with which he served are long gone - either retired, sold or sunk. Some of these were the C.H.S. Kapuskasing, C.H.S. Acadia, C.H.S. Henry Hudson, M.V. Terra Nova, C.H.S. Cartier and the M.V. Theron.

His first assignment as HIC was on the C.H.L. Anderson in 1953. Following this assignment he was given charge of the C.H.S. Cartier, M.V. Arctic Sealer, C.S.S. Baffin and the C.H.S. William J. Stewart.

In 1963 Russ transferred from Ottawa to the Atlantic Region. He was appointed Regional Hydrographer, Atlantic Region in 1964. He held this position until his retirement last year.

Prior to his leaving Russ was honoured at a C.H.A. party. He is shown on the right below receiving from Steve MacPhee one of the many gifts presented to him - a Canadian Hydrographic Service Crest.

The memory of Russ Melanson will remain forever with all those associated with him. His was a time of change within the hydrographic service. The

pioneering efforts of Russ and his contemporaries are and always will be an inspiration to the younger hydrographers of today.

*"A fair breeze blew, the white foam flew,
The furrow followed free
We were the FIRST that ever burst,
Into that silent sea."*

*The Ancient Mariner,
S.T. Coleridge*




We are on the Map!

The "B" event was won by Barry Little's rink.

H₂O Bonspiel

Local curlers gathered at the Humber Highland Curling Club on Jan. 20, 1979 to participate in the 8th Annual H₂O Bonspiel sponsored by the Central Branch of the Canadian Hydrographers' Association.

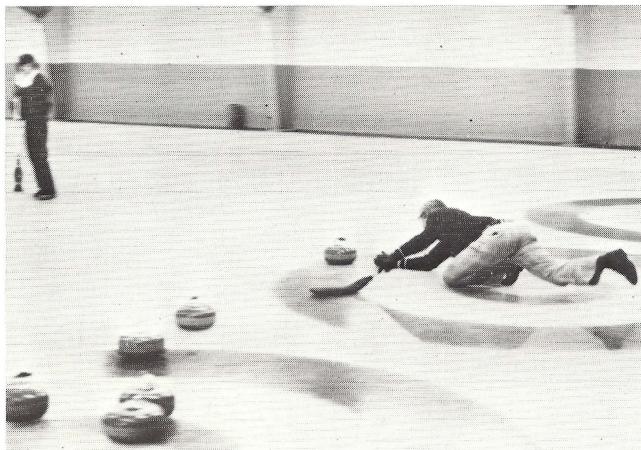

After an afternoon of highly competitive curling, the rink skipped by Guy Paquette emerged as winners of the "A" event.




(From left) Paul Warren, Carla Covey, Brian Power, and Guy Paquette.



(From left) Marg Chapeskie, Geoff Thompson, Peggy Sinclair, and Barry Little.

At the banquet following the bonspiel, Ray Chapeskie, CHA Vice-President for Central Region, presented the winning teams with trophies and prizes.

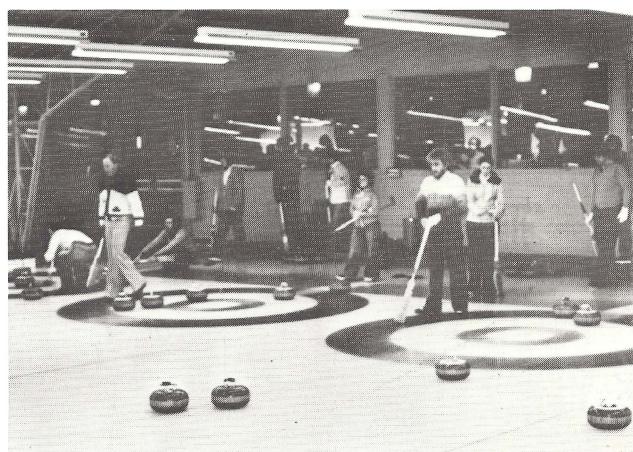

Donations for the bonspiel were gratefully received from the following companies:

- Canadian Applied Technology, Buttonville, Ont.
- W.T. Chatham Associates Ltd., Hamilton, Ont.
- C-Tech Ltd., Cornwall, Ont.
- J.H. French & Co. Ltd., Hamilton, Ont.
- Marinav Corporation, Ottawa, Ont.
- Marshall Macklin Monaghan Ltd., Don Mills, Ont.
- Motorola Military and Aerospace Electronics, Willowdale, Ont.
- Port Weller Dry Docks Ltd., St. Catherines, Ont.
- Rapid Blue Print Ltd., Hamilton, Ont.
- Wild Leitz Canada Ltd., Ottawa, Ont.

LIGHTHOUSE,
c/o Canadian Hydrographers Association,
P.O. Box 5050,
867 Lakeshore Rd.,
Burlington, Ontario L7R 4A6

Yes, I would like to become a subscriber to LIGHTHOUSE.
I wish to receive your journal for a period of year(s)
and have enclosed my payment of \$.....

NAME

FIRM

ADDRESS

city prov code

yearly subscription rate (\$6.00)

Make cheque or money order payable to the Canadian Hydrographers Association

Correction

In the November, 1978 issue of LIGHTHOUSE, on page 13 (yes, page 13), the name of the Town of Sidney was incorrectly spelled as Sydney in the title for R. W. Sandilands' article. The editor's apologies go out both to Mr. Sandilands and to the people of Sidney for this error.

Guess the Location

A tidal survey was carried out in 1940 to determine whether the permanent gauge located in Churchill Harbour recorded tidal times and heights that were significantly different from those outside the harbour in Hudson Bay. The structure shown in the picture on page 17 was erected outside the harbour at Sandy Bay, 1.5 miles (0.5 km) south-east of Cape Perry. It operated from July 28 to September 1st when, presumably, it was destroyed. The data obtained did not resolve the mystery and the question is debated to this day.

Back issues of **LIGHTHOUSE**
are available
at a cost of \$3.00.
Order through the Editor.

CHANGE OF ADDRESS
Please advise the Editor
if we are not using your
correct address.

BARRI AMOR C.S.T.
416-637-0752

RAYTHEON AND FURUNO
SOUNDER RENTALS

A-P EXPLORATION SERVICES

BOX 782, OAKVILLE, ONTARIO
CANADA L6J 5C5

HYDROGRAPHIC SURVEYS • OFFSHORE POSITIONING
SHORELINE SURVEYS • SHALLOW WATER DIVING
UNDERWATER INSPECTION and PHOTOGRAPHY




ACOUSTIC PINGER AND ACOUSTIC RELEASE

The model 104 acoustic pinger is designed for economical operation in shallow water (0-600 meters). Standard frequency of operation is 8 KHz and 16 KHz. This pinger is ideal for use as a long term underwater marker-beacon.

The model 105 acoustic release is a reusable motor driven release, controlled by digital circuitry which can be triggered from the surface by a specific tone or by secured code.


The surface unit has the same electrical characteristics as CLCL model 104.

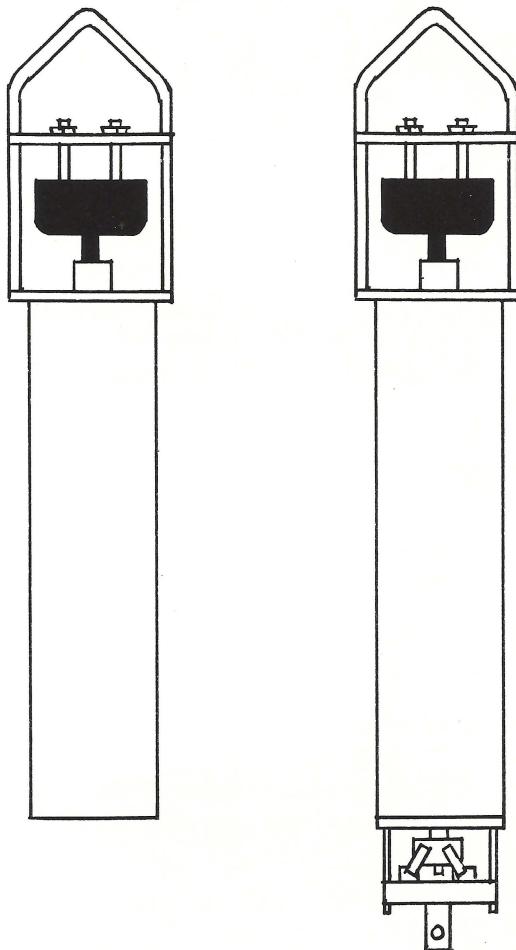


Caulfield-Liron Consultants Limited

5208 - 82 Avenue
Edmonton, Alta. T6B 0E6
Phone (403) 465-0502
Telex 037-2106


LOOKING FOR SHIPWRECKS...?

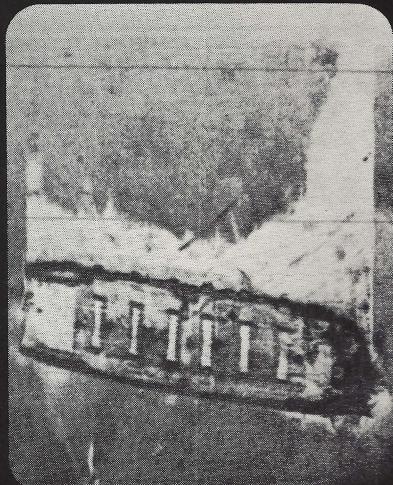

Klein HYDROSCAN Side Scan Sonar
Record of an Old Wooden Sailing
Barge in the Great Lakes.

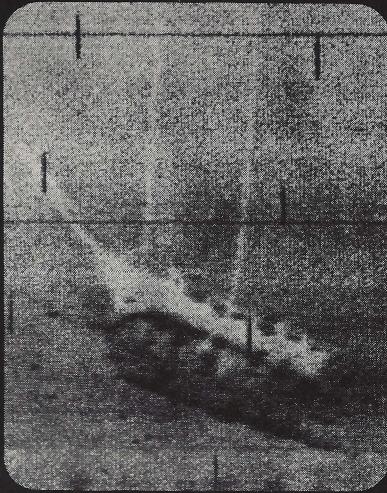

American Schooner Hamilton which
sank in Lake Ontario in the war of 1812
[Courtesy Royal Ontario Museum and
Canada Centre for Inland Waters].

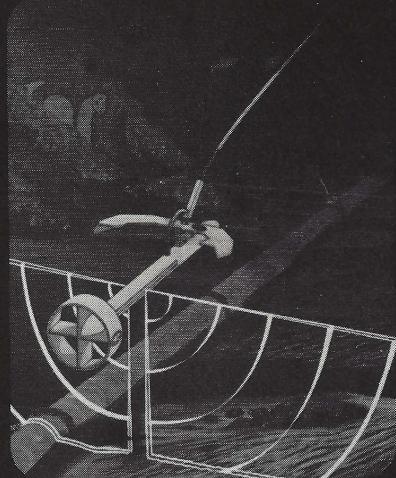

Klein HYDROSCAN Side Scan Sonar
Record of the Ironclad U.S.S. Monitor
[Courtesy of the Harbor Branch
Foundation].




Schooner Turned into Barge.

YOU OUGHT TO HAVE THE BEST...

HYDROSCAN


Klein Side Scan Sonar



KLEIN ASSOCIATES, INC.
UNDERSEA SEARCH AND SURVEY
Route 111•RFD 2•Salem, New Hampshire 03079•USA
[603]893-6131 Telex 94-7439 Cable: SONAR

Now Tellurometer MRD1 computerises position fixing

Microprocessor controlled
Multi-user capability
Third range option

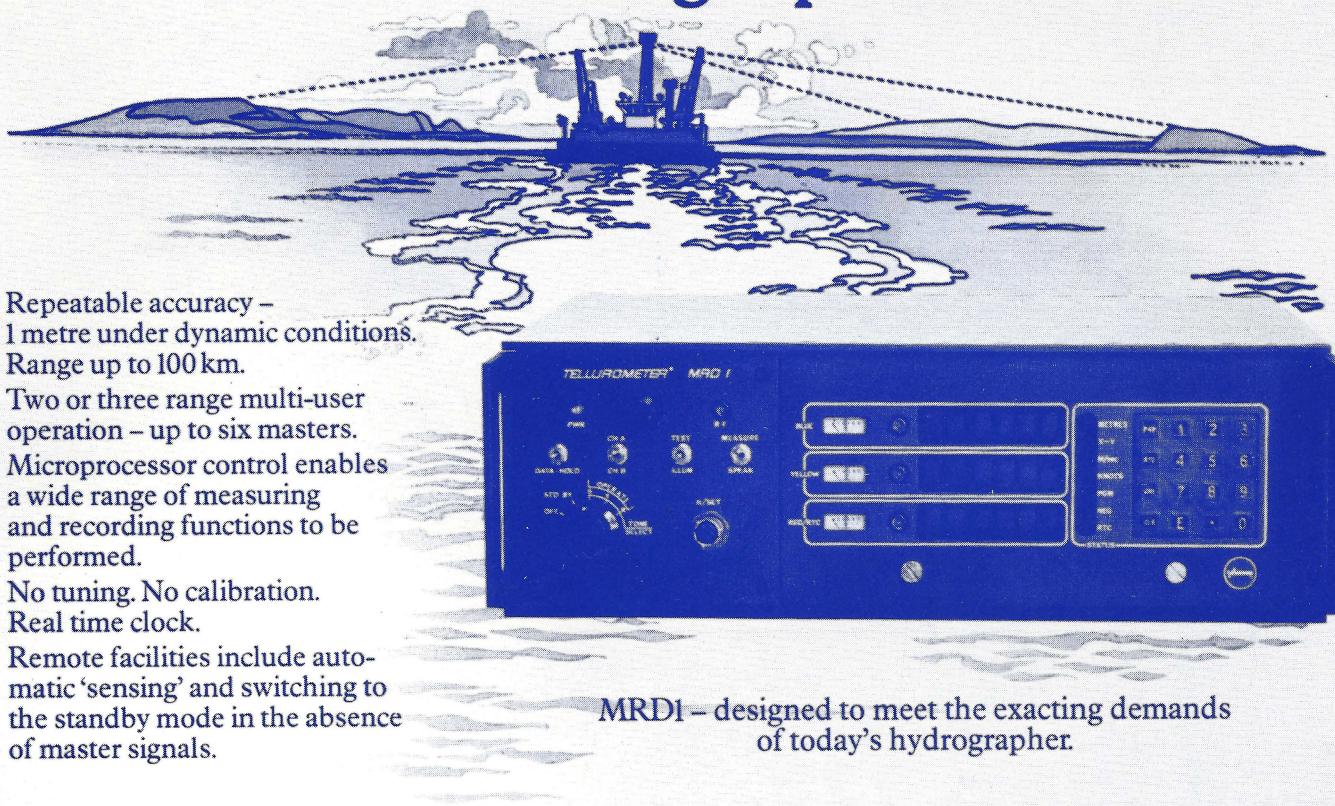

Repeatable accuracy –
1 metre under dynamic conditions.
Range up to 100 km.

Two or three range multi-user
operation – up to six masters.

Microprocessor control enables
a wide range of measuring
and recording functions to be
performed.

No tuning. No calibration.
Real time clock.

Remote facilities include auto-
matic 'sensing' and switching to
the standby mode in the absence
of master signals.

MRD1 – designed to meet the exacting demands
of today's hydrographer.

TELLUROMETER

a member of the **PLESSEY GROUP**



U.K.
Oakcroft Road, Chessington,
Surrey, KT9 1RQ.
Telephone: (01) 397 8244
Telex: 917340

U.S.A.
89 Marcus Blvd, Hauppauge,
New York, 11787.
Telephone: 62317710
Telex: 961419

CANADA
300 Supertest Road, Downsview,
Ontario, M3J 2M2.
Telephone: 6615224
Telex: 06524488